

Furon® CDV-1000 Compact Diaphragm Valve

Pneumatically Actuated 2-Way (1/2" Orifice)



Features/Benefits

- Compact Design
- Superior MTBF (Mean Time Before Failure)
- Injection-Molded, ultra high-purity, PFA-Wetted flow path with virgin PTFE diaphragm
- No exposed metalics
- Leak detection capability
- Visual position indication with provision for fiber optic position sensor
- High back-pressure capability
- Assembled and double-bagged in a Class 100 cleanroom
- Patented diaphragm technology
- Super type PillarFitting® available
- Small footprint
- Operates to millions of cycles
- Compatible with wide variety of systems
- Meets the semiconductor industry's ultra high purity chemical requirements
- Uniform modular design ideally suited for customized manifold configurations
- Suitable for high back-pressure applications
- No hold-up volume, complete drain down

Operation

- Pneumatically actuated valve
- 90 PSIG (13.05 kPa) rated/bidirectional

Applications

- Designed for use in the delivery of high purity chemical in corrosive semiconductor applications
- Ideal for applications which require both a high C_v factor and minimum footprint


Furon® CDV-1000 Compact Diaphragm Valve Pneumatically Actuated 2-Way

Ordering Information

Part Number	Availability	Orifice Size	End Connection	C _v Flow Factor	Port Size	A	B	C	D	E	F	G	H	I	J
CDV2-PN88 NC	Assembly Stock	1/2"	Super Type	2.0	1/2"	4.11 (104.59mm)	2.35 (59.69mm)	1.18 (29.97mm)	3.58 (90.42mm)	2.81 (71.37mm)	4.76 (121.00mm)	2.44 (61.96mm)	1.65 (41.91mm)	2.24 (57.00mm)	2.67 (67.82mm)
CDV2-F88 NC	Stock	1/2"	Flare Grip II	2.0	1/2"	4.11 (104.59mm)	2.35 (59.69mm)	1.18 (29.97mm)	3.58 (90.42mm)	2.81 (71.37mm)	4.72 (119.89mm)	2.44 (61.96mm)	1.65 (41.91mm)	2.24 (57.00mm)	2.67 (67.82mm)

Standard Options


- REO: Restricted Open
- REB: Restricted Both
- Adj: Micro-Adjust Bypass
- NO: Normally Open

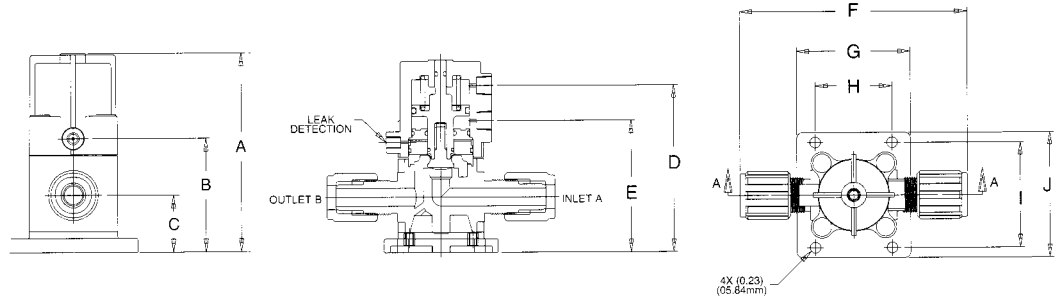

Specifications And Performance

- Ambient operating temperature—
32°F to 120°F (0°C to 50°C)
- Media operating temperature—
41°F to 180°F (5°C to 82°C)
- Pilot pressure minimum,—
60 PSIG/Maximum, 100 PSIG
- Media operating pressure—
90 PSIG at room temperature
- Maximum back pressure—PSIG
- C_v flow factor 3.0 with 1/2" PT
port connections
- Vacuum capability to 27" Hg

Inlet Pressure vs. Flow

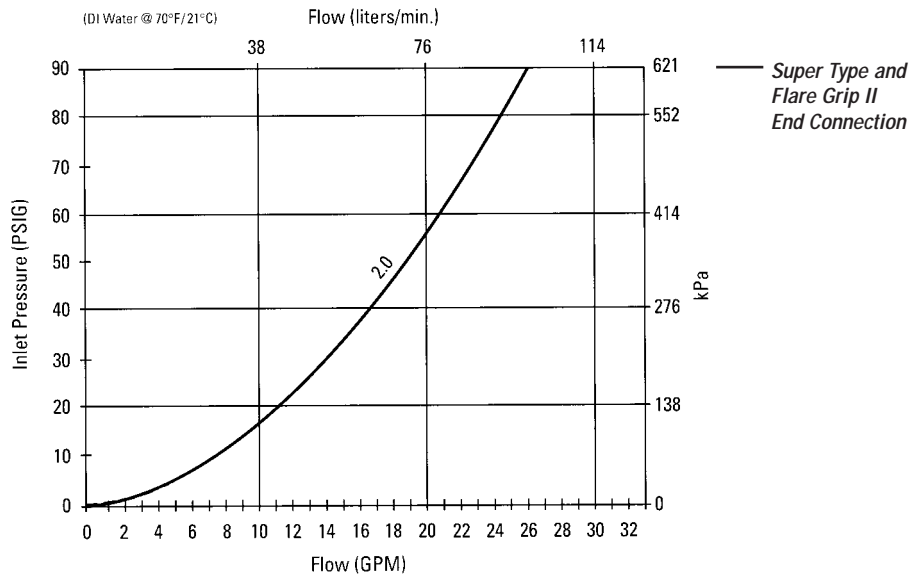

Saint-Gobain Performance Plastics-USA

7301 Orangewood Avenue
Garden Grove, CA 92841-1411
Tel: (714) 630-5818
Fax: (714) 688-2614
USA Toll Free: (800) 833-5661

France

Tel: 33/(0) 1 55 68 59 59
Fax: 33/(0) 1 55 68 59 68

Japan

Tel: 81/(0) 2 6679 6400
Fax: 81/(0) 2 6670 1001



Furon® is a registered trademark.
Flare Grip® is a registered trademark.
PillarFitting® is a registered trademark of
Nippon Pillar Packaging Co., LTD.
Furon Company is an authorized distributor
and licensee of the Super Type PillarFitting®.

12-month Limited Warranty: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product to be free from defects in manufacturing. This company's only obligation will be to provide replacement product for any material proven to have such a defect, or at SGPPL's option, to refund the purchase price thereof. User assumes all other risks, if any including the risk of injury, loss or damage, whether direct, consequential or incidental, arising out of the use, misuse, or inability to use this product. SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product or of any final product into which the product may be incorporated by the purchaser and/or user.