



FURON[®] NO O-RING FITTINGS

FLEXIBILITY FOR
WELDED SYSTEMS

Utilizing our patent-protected tongue and groove seal, Furon No-O-ring Union provides flexibility to your welded system through its dismantling capability. It also lets you design a complex welded system that can be separated in sub-modules, enabling faster manipulation, installation and maintenance procedures.

APPLICATIONS

The Furon No-O-ring Union primarily is utilized in welded systems that require easy manipulation and versatility in design but at the same time offers premium flow capability, cleanliness and safety.

Furon No-O-ring Unions are particularly well adapted in the following applications:

- Chemical delivery systems
- Welded Valve boxes
- Manifolds


FEATURES AND BENEFITS

- Molded from virgin premium high-purity PFA
- Ideally used with:
 - Furon HP PFA 400 Tubing
- Patent protected tongue and groove seal
- O-ring free design
- Universal chemical resistance and compatibility
- High pressure capability
- Retains seal integrity over countless disassemblies/reassemblies
- No Dead space
- Available up to 2"

Furon® No O-Ring Fittings

FURON NO O-RING UNION

Description	Nominal Pipe Size by Schedule 40	A		B		C		D		E HEX	
	in	in	mm	in	mm	in	mm	in	mm	in	mm
	SSUM-8788	1/2	4.26	108.2	0.84	21.3	0.607	15.4	2.00	50.8	0.87
SSUM-8788-C	2.26		57.4								
SSUM-1271212	3/4	4.47	113.5	1.05	26.6	0.809	20.5	2.13	54.1	1.05	26.7
SSUM-1271212-C		2.47	62.7								
SSUM-1671616	1	4.49	114.0	1.315	33.4	1.033	26.2	2.50	63.5	1.315	33.4
SSUM-1671616-C		2.49	63.2								
SSUM-3273232	2	3.8	96.3	2.07	52.6	2.38	60.5	3.50	88.9	2.375	60.3

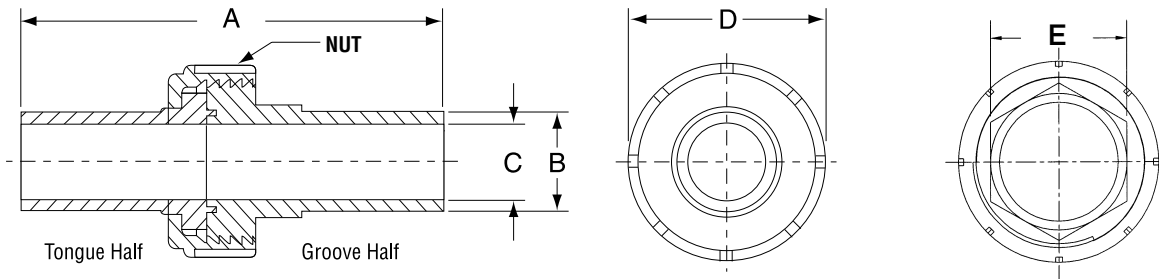


TECHNICAL SPECIFICATIONS - NO O-RING

Fitting Body Material	100% Virgin High Purity PFA
Max. Operating Temperature*	See graphical chart
Max. Operating Pressure**	See graphical chart
Nut Material	ETFE

*At ambient temperature
 **Based on size, [please contact us](#) for more details or specific configuration

Maximum Operating Pressure

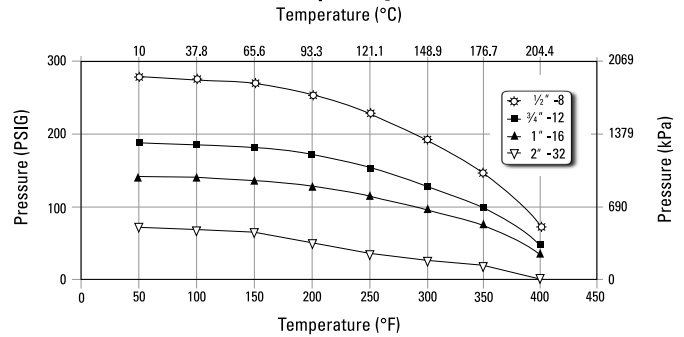

Saint-Gobain Performance Plastics

China (+8621) 5472 1568
 Sales.PPLCN@saint-gobain.com
Europe (+33) 3 85 20 27 00
 quotes-clm@saint-gobain.com
India (+91) 80 46978888
 pplindia.hc@saint-gobain.com

Japan (+81) 3 6256 9703
 ls-japan@saint-gobain.com
Korea (+82) 2 6098 0180
 LS-Korea@saint-gobain.com
Southeast Asia (+66) 38 667 800
 cs.sgplsea@saint-gobain.com

Taiwan (+886) 2 2503 4201
 Taiwan.ppl@saint-gobain.com
United States (+1) 800-833-5661
 gardengrovequoteteam@saint-gobain.com
All Other Regions
 www.furon.com

NOTE: This document is intended to provide information about the product to enable you to consider whether generally the Product meets your application need and is not intended to provide product specification. This document should not be considered a Product warranty or guaranty. To the extent this document mentions any tests done by Saint-Gobain, such tests are done under controlled laboratory circumstances and hence other factors in your use and application may impact such values. Saint-Gobain strongly recommends that you conduct practical tests simulating the conditions of your application to ensure that the product meets your requirements for your specific application

Furon® and Grab Seal™ are registered trademarks of Saint-Gobain Performance Plastics.

WARRANTY: Saint-Gobain warranties that the Product will meet specifications at the time of delivery and honor such warranty claims for a period of 30 months after delivery. In the event that you are a distributor purchasing Saint-Gobain Product, any change to specification while in your control as a result of storage conditions or otherwise may cause the above warranty to be voided. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.