



Furon[®] HP PFA Pipe

High-Purity PFA Piping Schedule 40

Furon HP PFA Pipe, formerly known as Furon FuseBond™ High Purity Pipe, is specifically designed to be used with the harshest chemicals while offering an excellent level of purity.

High Purity, Superior Chemical Resistance

With the usage of high purity PFA grade resin, Furon HP PFA Pipe is the ideal component for your fuse bond manifold and assembly from a fraction of an inch on your wafer processing equipment to several inches in your chemical distribution systems.

Furon HP PFA Pipe is ideal for the semiconductor industry, or other applications requiring high purity and/or superior chemical resistance.



Features and Benefits

- 100% virgin high-purity PFA resin
 - Specific material grade available
- Custom laser scribing available (for identifying chemicals/process media, tool number, OEM's name/private label, etc.)
- Optional ISO Class 7 cleanroom manufacturing environment
- Packed in sealed PE bag
- Optional tube ends capped to prevent I.D. contamination when unpacked

ASK AN ENGINEER

Furon HP PFA Pipe

Part Number	Nominal Size (in) by Schedule 40	O.D.		O.D. Tolerance		Minimal Wall Thickness		Wall Thickness Tolerance	
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
TCFHP.713012.A5	1/4	0.540	13.72	+/- 0.004	+/- 0.10	0.088	2.24	0/+ 0.020	0/+ 0.51
TCFHP.713012.A6	3/8	0.675	17.15	+/- 0.004	+/- 0.10	0.091	2.31	0/+ 0.020	0/+ 0.51
TCFHP.713012.A1	1/2	0.840	21.34	+/- 0.004	+/- 0.10	0.109	2.77	0/+ 0.020	0/+ 0.51
TCFHP.713012.A3	3/4	1.050	26.67	+/- 0.004	+/- 0.10	0.113	2.87	0/+ 0.020	0/+ 0.51
TCFHP.713012.A2	1	1.315	33.40	+/- 0.005	+/- 0.13	0.133	3.38	0/+ 0.020	0/+ 0.51
TCFHP.713012.A7	1 - 1/4	1.660	42.16	+/- 0.005	+/- 0.13	0.140	3.56	0/+ 0.020	0/+ 0.51
TCFHP.713012.A8	1 - 1/2	1.900	48.26	+/- 0.005	+/- 0.13	0.145	3.68	0/+ 0.020	0/+ 0.51
TCFHP.713012.A9	2	2.375	60.33	+/- 0.005	+/- 0.13	0.154	3.91	0/+ 0.020	0/+ 0.51

Standard Packaging



Straight length of 10 feet or 3 meters in sealed PE bags.

Customization

Specific grades of raw materials or packaging may be required; contact the factory for related PN Custom laser scribing to identify chemicals/process media, for OEM's name/private label, and for additional information regarding the full list of capabilities.

Specifications

Furon HP PFA Pipe - Working Pressures

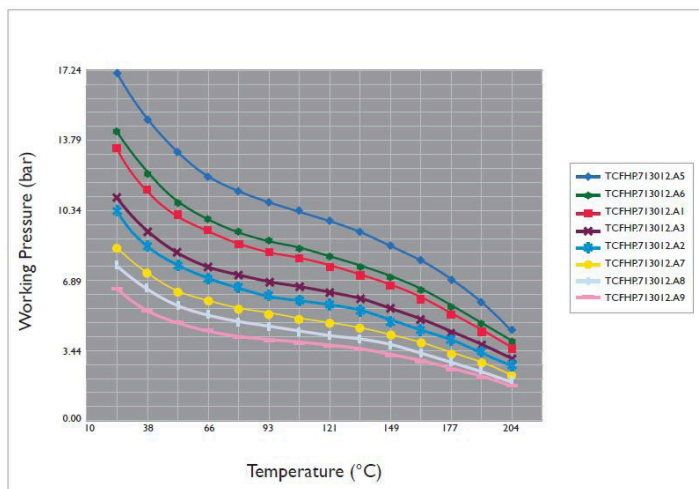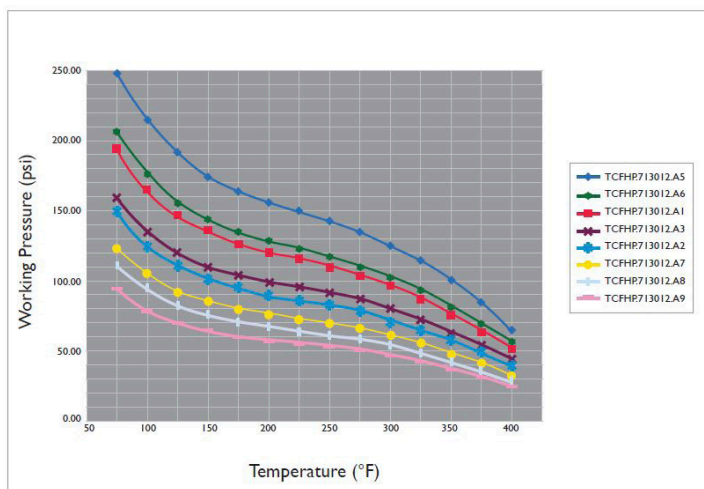

Note: The value represented in the above graphs has been obtained with a safety factor of 3.



Saint-Gobain Performance Plastics

210 Harmony Road
Mickleton, NJ 08056
USA

Tel: +1-856-423-6630
Fax: +1-856-423-8182

Saint-Gobain Performance Plastics - France

56, Chemin des Berthilliers
71850 Charnay-lès-Mâcon
France

Tel: (33) 3-85-20-27-00
Fax: (33) 3-85-29-18-48

NOTE: This document is intended to provide information about the product to enable you to consider whether generally the Product meets your application need and is not intended to provide product specification. This document should not be considered a Product warranty or guaranty. To the extent this document mentions any tests done by Saint-Gobain, such tests are done under controlled laboratory circumstances and hence other factors in your use and application may impact such values. Saint-Gobain strongly recommends that you conduct practical tests simulating the conditions of your application to ensure that the product meets your requirements for your specific application.

Furon® is a registered trademark of Saint-Gobain Performance Plastics.