

FURON[®] ASPIRATOR

SOLUTION FOR CHEMICAL SIPHONING

Furon Aspirators provide an economical option for siphoning liquid chemicals from a process vessel. The Aspirator can be actuated with air or liquid. Using a gas on our air-actuated aspirator will create a suction effect, allowing chemicals to be smoothly siphoned from the vessel. Using liquid, such as DI water as the driving media, and applying water at a pressure of 10 PSI (0.7 bar) or more create the suction effect. The chemical is diluted by water as it is siphoned through the aspirator. A specific dilution ratio may be targeted by a ratio siphon disk inserted at the siphon point, making Furon Aspirators a reliable means of diluting concentrated chemicals in wet process applications or disposing of spent chemicals.

APPLICATIONS

- Siphoning process vessel by using a gas to operate
- Diluting chemical by using a compatible specific liquid to operate

FEATURES AND BENEFITS

- 100% High purity virgin PTFE construction
- Compact design
- Cost effective solution for siphoning chemicals
- Smart and simple solution to dilute your chemicals
- Easy installation

SPECIFICATIONS

Description	Actuation Type	Dilution Ratio	Inlet Port FNPT		Outlet Port FNPT		Siphon Port FNPT	
			in	mm	in	mm	in	mm
A-1886-3:1	Liquid	3:1	3/8	9.5	1/2	12.7	1/2	12.7
A-1886-6:1		6:1						
A-1886-10:1		10:1						
A-A-1866	Air	N/A	3/8	9.5	1/2	12.7	3/8	9.5
A-A-1886							1/2	12.7

OPTIONS

Other end connections not listed:

- FlareGrip® II
- Nippon Pillar Super 300®
- Custom configurations

[Please contact us](#) for further details

TECHNICAL SPECIFICATIONS

Input Media Pressure 5 to 60 PSIG (0.3 to 4 bar)

Max. Operating Temperature Ambient: 149°F (65°C)
Media: 302°F (150°C)


LIQUID ASPIRATORS

Fluid Pressure Required to Achieve Suction 10 PSI (0.7 bar)

Max. Flow at Outlet Port 2.5 GPM (9.5 LPM)

AIR ASPIRATORS

Air Pressure		Suction Generated		Flow at Outlet	
psi	bar	Hg	torr	GPM	LPM
20	1.4	1.5"	38.1	0.5	1.9
30	2.1	2.5"	63.5	0.75	2.8
40	2.8	4.0"	101.6	1	3.8
50	3.4	5.0"	127.0		
60	4.1	6.0"	152.4		

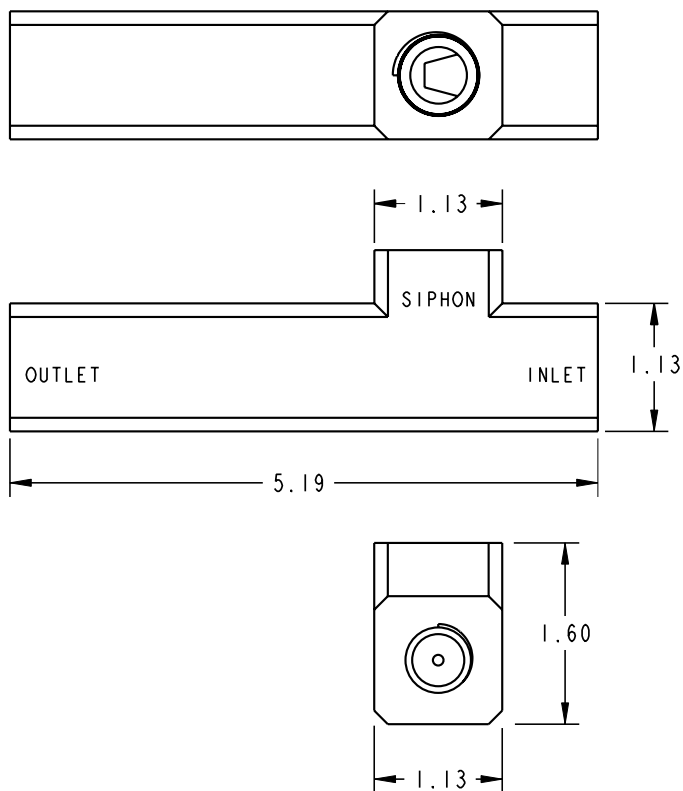

Saint-Gobain Performance Plastics

China (+8621) 5472 1568
Sales.PPLCN@saint-gobain.com

Europe (+33) 3 85 20 27 00
quotes-clm@saint-gobain.com

India (+91) 80 46978888
pplindia.hc@saint-gobain.com

Japan (+81) 3 6256 9703
ls-japan@saint-gobain.com

Korea (+82) 2 6098 0180
LS-Korea@saint-gobain.com

Southeast Asia (+66) 38 667 800
cs.sgplsea@saint-gobain.com

Taiwan (+886) 2 2503 4201
Taiwan.ppl@saint-gobain.com

United States (+1) 800-833-5661
gardengrove@team@saint-gobain.com

All Other Regions
www.furon.com

NOTE: This document is intended to provide information about the product to enable you to consider whether generally the Product meets your application need and is not intended to provide product specification. This document should not be considered a Product warranty or guaranty. To the extent this document mentions any tests done by Saint-Gobain, such tests are done under controlled laboratory circumstances and hence other factors in your use and application may impact such values. Saint-Gobain strongly recommends that you conduct practical tests simulating the conditions of your application to ensure that the product meets your requirements for your specific application

Furon®, FlareGrip®, Fluoroloy® and FuseBond™ are registered trademarks of Saint-Gobain Performance Plastics. Nippon Pillar Super 300® is a registered trademark of Nippon Pillar Packing Co.

WARRANTY: Saint-Gobain warrants that the Product will meet specifications at the time of delivery and honor such warranty claims for a period of 18 months after delivery. In the event that you are a distributor purchasing Saint-Gobain Product, any change to specification while in your control as a result of storage conditions or otherwise may cause the above warranty to be voided. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.