



FURON[®] HPVM-RV VALVE

2-WAY

PRESSURE RELIEF VALVE
1/4" ORIFICE

The Furon Pressure Relief Valve (HPVM-RV) is built on a simple and efficient design that allows the valve to open and relieve to a certain pressure. The valve comes preset from the factory at a certain pressure rating, but can be easily adjusted in the field with a knob which is located at its top. The valve can be installed in any position and is designed on the existing Furon HPVM valve base, ensuring it meets the most stringent requirement from your Semiconductor application.

APPLICATIONS

The Furon HPVM-RV Pressure Relief Valve is designed specifically for those applications where there is a need to ensure that pressure does not build in above a certain value, that you may preset in advance.

FEATURES AND BENEFITS

- High-purity Fluoropolymer construction:
 - High-Purity injected PFA body
 - High-Purity high fatigue PTFE diaphragm
- Compact design
- Easy adjust via knob
 - From 25 to 80 PSIG
- Build on industry proven valve
- Various flow configuration available

SPECIFICATIONS

Description	End Connection Type	Orifice Size		End Connection Size		A	
		in	mm	in	mm	in	mm
HPVM2-F44-RV	FlareGrip® II	1/4	6.35	1/4	6.35	3.5	89.90
HPVM2-F46-RV	FlareGrip® II			3/8	9.52	3.8	95.30
HPVM2-S30044-RV	Nippon Pillar Super 300®			1/4	6.35	2.7	68.58
HPVM2-S30046-RV	Nippon Pillar Super 300®			3/8	9.52	3.1	78.74

HPVM-RV may be ordered with a fixed preset value for the relief function.


OPTIONS

- PFA Flare nuts (add-3)
- ETFE nuts (add-2)
- Other end connection types available:
 - FNPT

[Please contact us](#) for further details

TECHNICAL SPECIFICATIONS

Max Operating Pressure	80 psig (5.5 bar)
Flow	Up to C _v 0.82
Max Operating Temperature	Ambient: 140°F (60°C) Media: 203°F (95°C)
Adjustable Pressure Range	25 – 80 PSIG (1.7 – 5.5 bar)
Body	PFA
Diaphragm	Modified PTFE
Actuator Housing	Polypropylene

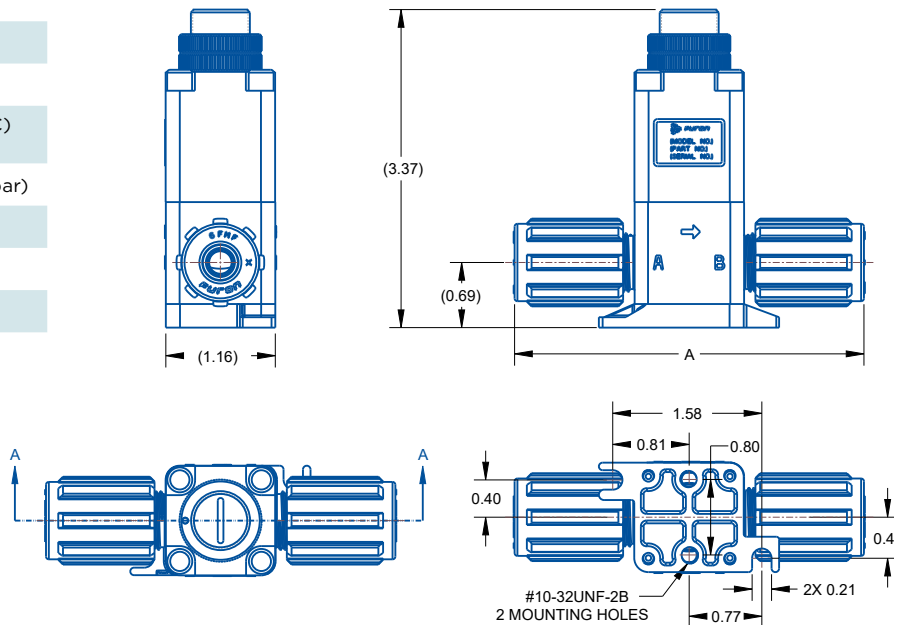

Saint-Gobain Performance Plastics

China (+86) 400 888 0198
sales.PPSCN@saint-gobain.com

Europe (+33) 3 85 20 27 00
quotes-clm@saint-gobain.com

India (+91) 76208 22999
pplindia.hc@saint-gobain.com

Japan (+81) 3 6256 9703
ls-japan@saint-gobain.com

Korea (+82) 2 6098 0180
LS-Korea@saint-gobain.com

Southeast Asia (+66) 38 667 800
cs.sgplsea@saint-gobain.com

Taiwan (+886) 2 2503 4201
Taiwan.ppl@saint-gobain.com

United States (+1) 800-833-5661
gardengrovequoteteam@saint-gobain.com

All Other Regions
www.furon.com

NOTE: This document is intended to provide information about the product to enable you to consider whether generally the Product meets your application need and is not intended to provide product specification. This document should not be considered a Product warranty or guaranty. To the extent this document mentions any tests done by Saint-Gobain, such tests are done under controlled laboratory circumstances and hence other factors in your use and application may impact such values. Saint-Gobain strongly recommends that you conduct practical tests simulating the conditions of your application to ensure that the product meets your requirements for your specific application

Furon® and FlareGrip® are registered trademarks of Saint-Gobain Performance Plastics. Nippon Pillar Super 300® is a registered trademark of Nippon Pillar Packing Co.

WARRANTY: Saint-Gobain warranties that the Product will meet specifications at the time of delivery and honor such warranty claims for a period of 30 months after delivery. In the event that you are a distributor purchasing Saint-Gobain Product, any change to specification while in your control as a result of storage conditions or otherwise may cause the above warranty to be voided. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.