

FURON[®]
Pure Performance

**HIGH-PURITY
FLUID HANDLING
SOLUTIONS FOR
MICROELECTRONICS**


SAINT-GOBAIN

PURITY PERFORMANCE INNOVATION

Saint-Gobain Performance Plastics is a world renowned manufacturer of high-performance fluoropolymer products for the most demanding fluid handling applications.

Through our **Furon®** product line, we offer unmatched solutions to meet your needs in demanding markets such as microelectronics, where high purity, safety, and reliability are critical. With a strong engineering focus on Research and Development, we pioneer application-specific material solutions and novel processing techniques for a wide variety of high-purity systems.

Our experienced team of engineers works closely with our customers to develop molded, extruded, machined, and cleanroom assembled products, ensuring a rapid product development cycle. Whether you are updating a current OEM tool to stay ahead of the competition or launching the next generation product to your marketplace, Saint-Gobain presents a wealth of resources to meet your needs in every aspect of the product development and production process.

We Offer

- Skilled senior-level engineering team with decades of experience in tool design, part design, materials processing, and materials selection for polymers and fluoropolymers
- Commitment to co-development solutions, supported by a dedicated Application Development Center that accelerates innovation through customization and rapid prototyping
- Vertically integrated clean manufacturing facilities, which provide complete process control from extruding and molding, to machining, to final assembly and test for reliable turnkey solutions

Global Products – Local Supports

We provide our worldwide customer base with technical support, customer service, and local inventory throughout North America, Asia and Europe, supported by manufacturing facilities in Europe and the United States.

Ordering Information

You can contact our customer service department in one of the following countries:

NORTH AMERICA

(+1) 800-833-5661
gardengrovequoteteam@saint-gobain.com
Tubing & Hose: (+1) 856-423-6630
DL-NA-MickletonCustomerService@saint-gobain.com

EUROPE

France (+33) 3 85 20 27 00
quotes-clm@saint-gobain.com
Germany (+49) 2131 53359-59
sales-neuss@saint-gobain.com

ASIA

China (+8621) 5472 1568
Sales.PPLCN@saint-gobain.com
Japan (+81) 3 6256 9703
ls-japan@saint-gobain.com
Korea (+82) 2 6098 0180
LS-Korea@saint-gobain.com
Southeast Asia (+66) 38 667 800 - 807 x7937
cs.sgplsea@saint-gobain.com
Taiwan (+886) 2 2503 4201
Taiwan.ppl@saint-gobain.com
India (+91) 80 46978888
pplindia.hc@saint-gobain.com

For all other regions, additional information on our products, or to request literature or CAD drawings, please visit our website at www.furon.com



MANUFACTURING CAPABILITIES & EXPERTISE

Saint-Gobain's capabilities include extrusion, compression and injection, isostatic and endothermic molding for a wide range of polymers ranging from commodity grade resins to highly engineered polymers and fluoropolymers. Our extensive process knowledge coupled with assembly in a state-of-the-art, build-clean environment and premium raw material ensures our products meet or exceed the most stringent cleanliness requirements of the Semiconductor and other highly demanding industries.

We offer an extensive product line of high-purity fluid handling components. Featuring the Furon® lines of fluoropolymer-based fluid handling components, our standard product line includes pumps, valves, fittings, accessories such as pressure regulators and static mixers, high-purity piping, and high-purity tubing with simple and complex shapes, such as convoluted or corrugated. In addition to our standard products, we utilize our unparalleled expertise in designing custom fluid handling systems to our customers' exact requirements for each specific application. We are experienced at solving the most challenging fluid handling problems, from ultra-pure chemistry to abrasive slurries to extremely harsh or aggressive liquids coupled with demanding process conditions on flow, pressure and temperature.

APPLICATIONS

<p>Chemical Delivery</p> <p>BCD</p>	<h3>Chemical Delivery</h3> <ul style="list-style-type: none">• Superior flow performance• High pressure capability
<p>Wafer Processing</p> <p>WP</p>	<h3>Wafer Processing</h3> <ul style="list-style-type: none">• Compact• Meet or exceed industry requirement
<p>Slurry</p> <p>CMP</p>	<h3>Slurry</h3> <ul style="list-style-type: none">• Reduce impact on slurry• Easy to clean
<p>Precision Dispense</p> <p>μL</p>	<h3>Precision Dispense</h3> <ul style="list-style-type: none">• Superior Accuracy & Precision• Focus on repeatability
<p>High Temperature</p> <p>°F/°C</p>	<h3>High Temperature</h3> <ul style="list-style-type: none">• Suitable with high temperature process• Optimal safety



VALVES

Our newest generation of **Furon valves** is constructed from high-purity, injection molded fluoropolymers including high-purity Perfluoroalkoxy (PFA). Our engineering expertise and patent-protected technologies allow us to provide the Semiconductor industry with valves that are 100% O-Ring free, metal free and/or maintenance free, ensuring optimal safety, system performance, and media purity.

STANDARD VALVES



FURON[®] UPX Valve

Configuration	2-Way or 3-Way
Orifice Size	1/4", 1/2", 3/4"
Standard	FlareGrip [®] II
Connection Types	FuseBond [™] Nippon Pillar Super 300 [®]
Connection Size	1/4", 3/8", 1/2", 3/4", 1"
Actuation Type	Pneumatic Manual Multi-Turn Manual Quarter-Turn
Max. Operating Pressure	100 PSIG (6.9 bar)
Max. Operating Temperature	230°F (110°C) 356°F (180°C) (High Temp)
C _v Factor	0.8 – 7.0
Leak Detection Port	Yes

Features/Benefits:

- 100 PSIG rated forward and back-pressure in 2-way & 3-way configuration
- Metal-free & O-ring design
- Furon SCR spring and bellows protection specifically rated for concentrated HF & HCl and other aggressive applications
- True dual containment with leak detection



FURON[®] Q-Valve

Configuration	2-Way
Orifice Size	1/4", 1/2", 3/4"
Standard	FlareGrip [®] II
Connection Types	FuseBond [™] Nippon Pillar Super 300 [®]
Connection Size	1/4", 3/8", 1/2", 3/4", 1"
Actuation Type	Pneumatic Manual Multi-Turn Manual Quarter-Turn
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	0.8 – 9.4
Leak Detection Port	Yes

Features/Benefits:

- 100% PFA, HP and virgin PTFE wetted flow path
- Integrated visual position indication
- Designed to be maintenance friendly
- Bi-directional flow
- Metal-free & O-ring design



HIGH FLOW VALVES



FURON[®] InLine Valve

Configuration	2-Way
Orifice Size	1"
Standard	FuseBond™
Connection Types	FlareGrip® II Nippon Pillar Super 300®
Connection Size	3/4", 1", 1-1/4"
Actuation Type	Pneumatic Manual Multi-Turn
Max. Operating Pressure	100 PSIG (6.9 bar)
Max. Operating Temperature	212°F (100°C)
C _v Factor	Up to 15
Leak Detection Port	Yes

Features/Benefits:

- 15 C_v Flow Factor
- Fully swept, low shear internal flow path
- Quick-release, non metallic, 8-position mounting base
- 100% PFA HP and Virgin PTFE wetted flow path



FURON[®] 2" HGVM Valve

Configuration	2-Way
Orifice Size	2"
Standard	FuseBond™
Connection Types	
Connection Size	1-1/2", 2"
Actuation Type	Pneumatic Manual Multi-Turn
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	52
Leak Detection Port	Yes

Features/Benefits:

- Maximum flow rating of C_v 52
- Fully swept flow path supports no-hold-up volume
- Visual position indication
- Leak detection capability





MANIFOLD VALVES



FURON® HPV & HPVM Mini Valve

Configuration	2-Way or 3-Way
Orifice Size	1/8"
Standard	Nippon Pillar Super 300®
Connection Types	
Connection Size	1/8"
Actuation Type	Pneumatic Manual Multi-Turn Manual Toggle
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	0.06
Leak Detection Port	OPTIONAL

Features/Benefits:

- True 1/8" orifice valve
- Pressure rated up to 80 PSIG
- Lowest internal volume in the industry for a 1/8" valve
- Tested for more than 1 million cycles
- Compatible integration into our custom manifold solutions
- Optimum C_v



FURON® HPVM Valve

Configuration	2-Way or 3-Way
Orifice Size	1/4"
Standard	FlareGrip® II
Connection Types	FuseBond™ Nippon Pillar Super 300®
Connection Size	1/4", 3/8"
Actuation Type	Pneumatic Manual Quarter-Turn: Electrical, 24 VDC Manual Multi-Turn: Electrical, 115 VAC
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	0.7
Leak Detection Port	YES/NO

Features/Benefits:

- High-purity PFA or PTFE wetted flow path and PTFE diaphragm
- 80 PSIG (5.5 bar) forward/back pressure rating
- Available in pneumatic normally closed, normally open, multi-turn, toggle and quarter-turn actuation



FURON® CDV Valve

Configuration	2-Way or 3-Way
Orifice Size	1/2"
Standard	FlareGrip® II
Connection Types	Nippon Pillar Super 300® FuseBond™
Connection Size	1/2", 3/4"
Actuation Type	Pneumatic Manual Multi-Turn Manual Quarter-Turn
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	3.0
Leak Detection Port	Yes

Features/Benefits:

- High-purity PFA wetted flow path with virgin PTFE diaphragm
- 90 PSIG (6.2 bar) rated forward and back pressure
- 2-way and 3-way configurations
- Available in pneumatic normally closed, normally open, multi-turn, and toggle actuation





FURON® J-Valve

Configuration	2-Way
Orifice Size	3/4"
Standard	FlareGrip® II
Connection Types	FuseBond™ Nippon Pillar Super 300®
Connection Size	3/4", 1"
Actuation Type	Pneumatic Manual Multi-Turn
Max. Operating Pressure	85 PSIG (5.9 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	5.2 - 7.2
Leak Detection Port	Yes

Features/Benefits:

- Maximum flow rating of C_v 7.2
- Fully swept flow path supports no-hold-up volume
- Visual position indication
- Leak detection capability



FURON® RDVM & SMDVM Self-Manifolding Valves

Configuration	2-Way
Orifice Size	1"
Standard	FlareGrip® II
Connection Types	
Connection Size	1/2", 3/4", 1", 1-1/4"
Actuation Type	Pneumatic Manual Multi-Turn
Max. Operating Pressure	100 PSIG (6.9 bar)
Max. Operating Temperature	212°F (100°C)
C _v Factor	Up to 15
Leak Detection Port	Yes

Features/Benefits:

- Maximum flow rating of C_v 15
- Minimal inventory requirements
- Available in pneumatic or manual-actuated versions
- Flexible design to meet a wide range of customer requirements
- May be assembled without special tools



CHECK VALVES



FURON[®] Mini Check Valve

Configuration	2-Way
Orifice Size	1/16", 1/8", 3/16", 1/4", 3/8"
Standard	FlareGrip [®] II
Connection Types	Nippon Pillar Super 300 [®]
Connection Size	1/8", 1/4", 3/8", 1/2"
Actuation Type	Media
Max. Operating Pressure	120 PSIG (8.3 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	0.1 – 1.9

Features/Benefits:

- Injection molded, high purity PFA and PTFE wetted flow path
- Cracking pressure less than 1 PSIG (0.07 bar)
- High-purity PFA spring
- O-ring free design



FURON[®] Large Check Valve

Configuration	2-Way
Orifice Size	1/2", 3/4", 1"
Standard	FlareGrip [®] II
Connection Types	Nippon Pillar Super 300 [®] FuseBond [™]
Connection Size	1/2", 3/4", 1"
Actuation Type	Media
Max. Operating Pressure	150 PSIG (10.3 bar)
Max. Operating Temperature	250°F (121°C)
C _v Factor	3.7 – 13

Features/Benefits:

- 100% high-purity PFA construction
- High flow capability (3.7 - 13 C_v)
- Cracking pressure less than 1 PSIG (0.07 bar)
- High-purity PFA spring
- O-ring free design



FURON[®] 2" Check Valve

Configuration	2-Way
Orifice Size	2"
Standard	FuseBond [™]
Connection Type	
Connection Size	1-1/2", 2"
Actuation Type	Media
Max. Operating Pressure	100 PSIG (6.8 bar)
Max. Operating Temperature	250°F (121°C)
C _v Factor	32

Features/Benefits:

- 100% high-purity fluoropolymer construction
- High flow capability (32 C_v)
- Zero dead volume body seal with no wetted thread areas
- Cracking pressure less than 1 PSIG (0.07 bar)
- O-ring free design



SPECIALTY VALVES



FURON[®] SCM (Stopcock) Valve

Configuration	2-Way or 3-Way
Orifice Size	5/32", 5/16"
Standard	FlareGrip [®] II
Connection Types	Male NPT
Connection Size	1/4", 3/8", 1/2"
Actuation Type	Manual
Max. Operating Pressure	45 PSIG (3 bar)
Max. Operating Temperature	140°F (60°C)
C _v Factor	0.44–4.68
Leak Detection Port	No

Features/Benefits:

- 100% high-purity PTFE and PFA wetted flow path
- O-ring free design
- 3-way valves available in both "L" and "T" configuration
- Panel mount versions are available



FURON[®] Metering Valve

Configuration	2-Way
Orifice Size	1/16"
Standard	Grab Seal [™]
Connection Types	Male NPT Female NPT
Connection Size	1/8", 1/4"
Actuation Type	Manual Multi-Turn
Max. Operating Pressure	75 PSIG (5.2 bar)
Max. Operating Temperature	212°F (100°C)
C _v Factor	0.2 – 0.5
Leak Detection Port	No

Features/Benefits:

- 100% virgin PTFE wetted parts for high-purity and corrosion resistance
- Fine thread on needle stem allows for precise metering and flow control
- Straight through flow path



FURON[®] Precision Plug Valve

Configuration	2-Way
Orifice Size	1/16", 1/8", 3/16", 1/4"
Standard	Grab Seal [™]
Connection Types	Female NPT
Connection Size	1/8", 1/4", 3/8", 1/2"
Actuation Type	Manual Multi-Turn
Max. Operating Pressure	75 PSIG (5.2 bar)
Max. Operating Temperature	212°F (100°C)
C _v Factor	0.2 – 0.5
Leak Detection Port	No

Features/Benefits:

- 100% virgin PTFE wetted parts for high-purity and corrosion resistance
- Bubble tight sealing
- Suitable for both liquid and gas applications
- Straight through flow path minimizes pressure drop





FURON® Suckback Valve

Configuration	2-Way
Orifice Size	1/4", 1/2"
Standard	FlareGrip® II
Connection Types	Nippon Pillar Super 300® Female NPT Tube End
Connection Size	1/4", 3/8", 1/2", 3/4"
Actuation Type	Pneumatic
Max. Operating Pressure	60 PSIG (4.1 bar)
Max. Operating Temperature	212°F (100°C)
C _v Factor	0.8 – 3.2
Leak Detection Port	Yes

Features/Benefits:

- All virgin PTFE/high-purity molded PFA wetted flow path
- Eliminates dripping of dispense media from nozzles
- Adjustable suckback capacity permits precise metering of dispense media
- Repeatability of suckback amount allows identical dispense media over time



FURON® Pressure Relief Valve (HPVM-RV)

Configuration	2-Way
Orifice Size	1/4"
Standard	FlareGrip® II
Connection Types	Nippon Pillar Super 300®
Connection Size	1/4", 3/8"
Actuation Type	Media
Max. Operating Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	203°F (95°C)
C _v Factor	Up to 0.82
Leak Detection Port	No

Features/Benefits:

- All virgin PTFE/high-purity molded PFA wetted flow path
- Protects upstream equipment from overpressure conditions
- Adjustable pressure relief setting from 10–90 PSIG
- Ideal for corrosive or aggressive media




FURON® Dilution Drain Valve

Configuration	2-Way
Orifice Size	1/2"
Standard	FlareGrip® II
Connection Types	
Connection Size	1/2", 3/4"
Actuation Type	Media
Max. Operating Pressure	60 PSIG (4.1 bar)
Max. Operating Temperature	302°F (150°C)
C _v Factor	2.5

Features/Benefits:

- Metal-free design
- Simple & compact design
- Adjustable dilution ratio




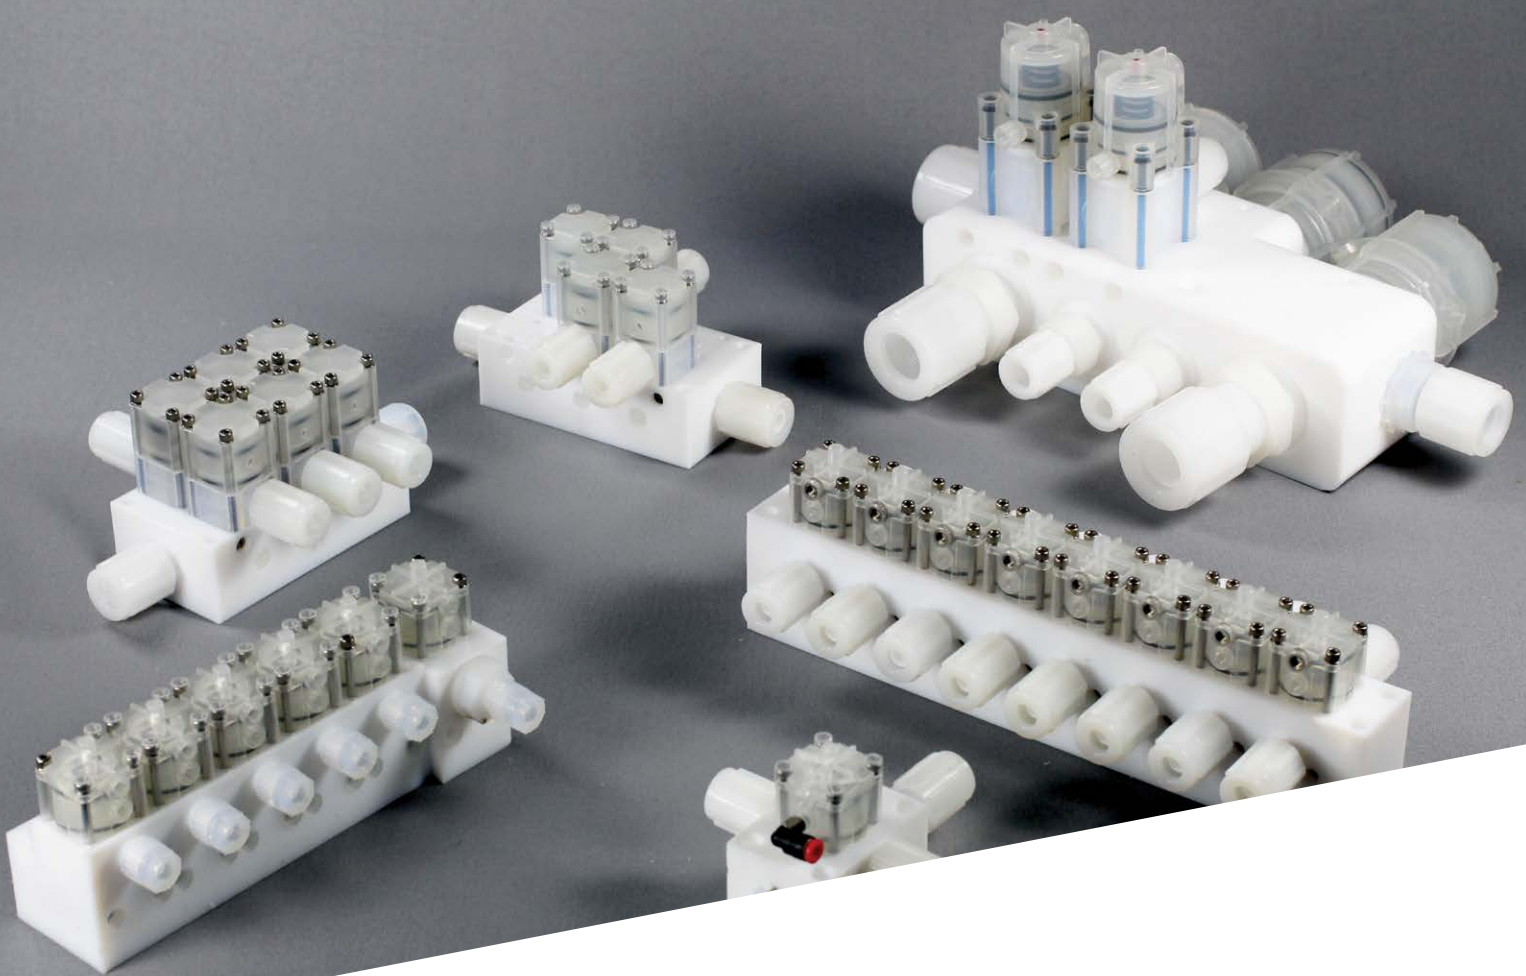

MANIFOLDS

The **Furon integrated manifold** product line features multiple function components in a single, pre-tested package that is easily installed into your system. Saint-Gobain valves are engineered to provide exceptional durability and reliability and deliver superior performance in countless combinations and configurations while providing an optimum cost of ownership for end user. Our dedicated manifold resources will support you in the development of all critical fluid applications.

Every Furon integrated manifold system benefits from 100% fluoropolymer wetted flow paths and cleanroom assembly, ensuring world-class quality and reliability. In addition, the Furon integrated manifold systems provide a substantial reduction in footprint and allow you to reduce the number of connections in your system, reducing potential leak and entrapment points for safer operation.

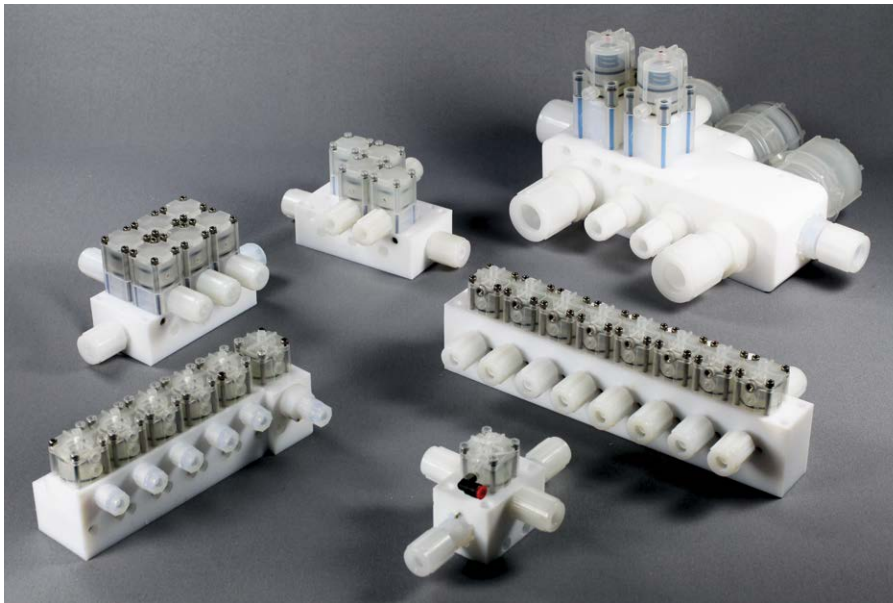

Configuration	2-Way or 3-Way
Orifice Size	3/16" to 2"
Standard	FlareGrip [®] II
Connection Types	FuseBond [™] Nippon Pillar Super 300 [®]
Connection Size	1/8" to 2"
Actuation Type	Pneumatic Toggle Manual Quarter-Turn Manual Multi-Turn
Max. Operating Pressure	100 PSIG (6.8 bar)
Max. Operating Temperature	Up to 356°F (180°C) for High Temp Version
C _v Factor	0.5 to 52
Leak Detection Port	Yes

Features/Benefits:

- Custom engineered to end user's exact specification
- Space savings more than 50% compared to discrete valves
- Significantly reduces number of connections between valves
- Endless design possibilities integrating a wide variety of valves and other flow components such as check valves, pressure regulators, static mixers



FURON[®] Manifold Vessels (Integrated)

Configuration	2-Way or 3-Way
Orifice Size	Up to 1"
Standard	FlareGrip [®] II
Connection Types	FuseBond [™] Nippon Pillar Super 300 [®]
Connection Size	Up to 1"
Actuation Type	Pneumatic Manual Quarter-Turn Manual Multi-Turn
Max. Operating Pressure	85 PSIG (5.9 bar)
Max. Operating Temperature	212 °F (100 °C)
C _v Factor	Up to 7.2
Leak Detection Port	Yes

Features/Benefits:

- Custom engineered to end user's exact specification
- Pre-tested
- Significantly reduces number of connections between valves
- Endless design possibilities integrating a wide variety of valves and other flow components such as check valves, pressure regulators, static mixers





PUMPS


Saint-Gobain is a global leader in dependable, fluoropolymer-based pumps designed specifically for delivery of high-purity and/or aggressive fluids.

Distribution Pumps

- Pneumatically-operated **Furon A2 pumps** feature 100% metal free & O-Ring free construction, eliminating any possibility of ionic contamination caused by exposure of corrosive chemicals to such components.
- **Furon High Temperature pumps** are manufactured from advanced engineering thermoplastics including fiber reinforcement to enable premium performance even at elevated temperature.
- **Furon High Flow pumps** are self-priming, providing an easy installation and set up for a high purity 100% metal-free pump and provides an adjustable high flow rate.
- **Furon PV Series pumps** offer a cost-effective solution for handling corrosive or aggressive media in your drain, sump or industrial applications.
- **Furon A2 Dampeners** are suitable for dampening aggressive chemicals or slurries, reducing pump pulsation up to 85% of their nominal value and directly adapt to the pump stroke and line pressure
- **Furon Turbo pumps** are magnetically-driven turbine pumps engineered to boost fluid pressure in deionized (DI) water applications, and with other low viscosity fluids.

Dosing Pumps

- **Furon MDP** and **Furon PPRD pumps** provide a solution for dosing a fraction of a micro-liter up to 80 milliliters per stroke with an emphasis of reproducibility. They also feature an embedded microprocessor-based controller for unmatched driving & control capabilities from your tool.

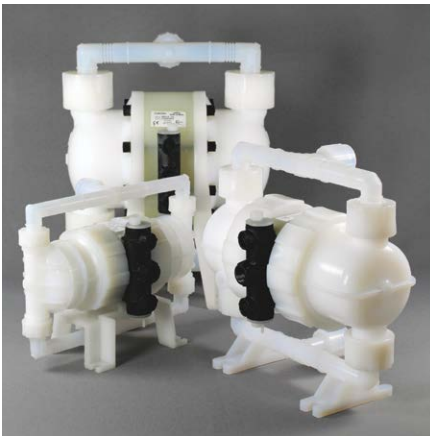

FURON[®] A2 Pump - Distribution

Pump Mechanism	Bellows
Max. Flow Rate	4 GPM (15 lpm) 8 GPM (30 lpm) 16 GPM (60 lpm)
Connection Type	FlareGrip [®] II Tube End
Connection Size	1/2", 3/4", 1"
Max Suction Head	10 feet (3 m) 12 feet (3.5 m) 14 feet (4 m)
Max. Back Pressure	80 PSIG (5.5 bar)
Max. Air Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	212°F (100°C)

Features/Benefits:

- Constructed from 100% high-purity fluoropolymer materials
- 100% Elastomer free
- Field-proven reliability in aggressive chemicals and slurries
- 2-year warranty, extendable to 6 years with preventive maintenance
- Designed to be maintenance friendly
- Flexible driving system




FURON[®] High Temperature Pump - Distribution

Pump Mechanism	Bellows
Max. Flow Rate	5 GPM (20 lpm) 13 GPM (50 lpm)
Connection Type	Flare Tube End
Connection Size	3/4", 1"
Max Suction Head	12 feet (3.6 m) 14 feet (4.2 m)
Max. Back Pressure	72.5 PSIG (5 bar)
Max. Air Pressure	72.5 PSIG (5 bar)
Max. Operating Temperature	350°F (180°C)

Features/Benefits:

- Capable of handling media temperatures up to 350°F (180°C)
- Designed to be maintenance friendly
- Flow rates up to 13 GPM (50 lpm)
- 100% high-purity PTFE/PFA construction

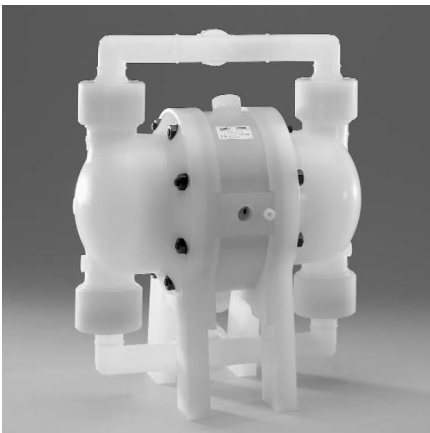

FURON[®] High Flow Pumps - Distribution

Pump Mechanism	Bellows
Max. Flow Rate	26 GPM (100 lpm)
Connection Type	Flare Tube
Connection Size	1"
Max Suction Head	13 feet (4 m)
Max. Back Pressure	58 PSIG (4 bar)
Max. Air Pressure	72.5 PSIG (5 bar)
Max. Operating Temperature	212°F (100°C)

Features/Benefits:

- 100% high purity PFA and PTFE wetted flow path
- Self-priming
- Liquid O-ring-free design
- Maintenance friendly design
- No metal parts
- Adjustable pump rate up to 100 lpm (26 gmp)



FURON[®] A2 Dampener

End Connection Orientation	Straight/Straight Straight/Elbow Elbow/Elbow
Connection Type	Flare Tube End
Connection Size	1/2", 3/4", 1"
Max. Liquid Pressure	80 PSIG (5.5 bar)
Max. Air Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	212°F (100°C)

Features/Benefits:

- Metal free dampener
- HP PFA/PTFE flow path
- O-ring-free flow path concept (tongue & groove concept)
- Warranty up to 5 years
- Flexible connection system compatible with all fitting types





FURON® PV Series Pumps - Distribution

Pump Mechanism	Bellows
Max. Flow Rate	8 GPM (30 lpm) 16 GPM (60 lpm)
Connection Type	FlareGrip® II Tube End
Connection Size	3/4", 1"
Max Suction Head	12 feet (3.5 m) 14 feet (4 m)
Max. Back Pressure	80 PSIG (5.5 bar)
Max. Air Pressure	80 PSIG (5.5 bar)
Max. Operating Temperature	212°F (100°C)

Features/Benefits:

- Cost effective solution for handling corrosive or aggressive media in industrial applications
- Ideal for sump or drain application
- 100% PTFE/PFA construction
- 2-year warranty, extendable to 6 years with preventive maintenance
- Flexible driving system



FURON® Turbo Pump - Booster

Pump Mechanism	Impeller
Control Mechanism	Magnetic Drive Motor
Max. Discharge Flow Rate	4.5 GPM (18 lpm)
Required Inlet Fluid Pressure	15–60 PSIG (1–4 bar)
Max. Media Temperature	122°F (50°C)
Max. Power Consumption	7.4 Amps

Features/Benefits:

- Seal-free magnetically coupled turbine pump
- High output pressure
- Ideal for use as a booster pump in DI water systems
- PTFE and alumina ceramic wetted parts





FURON® PPRD Pump - Dosing

Pump Mechanism	Bellows
Control Mechanism	Pneumatic
Dispense Volume	6 – 40 mL (PPRD1) 8 – 80 mL (PPRD2)
Max. Dispense Speed	0.5 GPM (120 l/hr) 1 GPM (240 l/hr)
Accuracy	± 1%
Max. Suction Head	6' (1.83 m)
Max. Back Pressure	60 PSIG (4.1 bar)
Max. Air Pressure	70 PSIG (4.8 bar)
Max. Air Consumption	3.5 SCFM (6 m³/h)
Max. Operating Temperature	212°F (100°C)

Features/Benefits:

- Designed for dosing small amounts of liquid (up to 80 mL)
- High-purity PTFE/PFA construction
- Accuracy ±1% per dose
- Suitable for use with aggressive or corrosive media




FURON® MDP Pump - Dosing

Pump Mechanism	Rolling Diaphragm
Control Mechanism	Pneumatic
Dispense Volume	0 – 10.0 mL 0 – 0.5 mL
Accuracy	±1%
Max. Suction Head	6' (1.83 m)
Max. Discharge Pressure	55 PSIG (3.8 bar)
Max. Air Pressure	70 PSIG (4.8 bar)
Max. Air Consumption	0.46 SCFM
Max. Operating Temperature	120°F (50°C)

Features/Benefits:

- Efficiently dispenses small amounts of liquid (up to 10 mL)
- Suitable for use in aggressive, corrosive, and ultra-pure liquids
- Easy manual adjustments for shot size and dispense speed
- Compact footprint

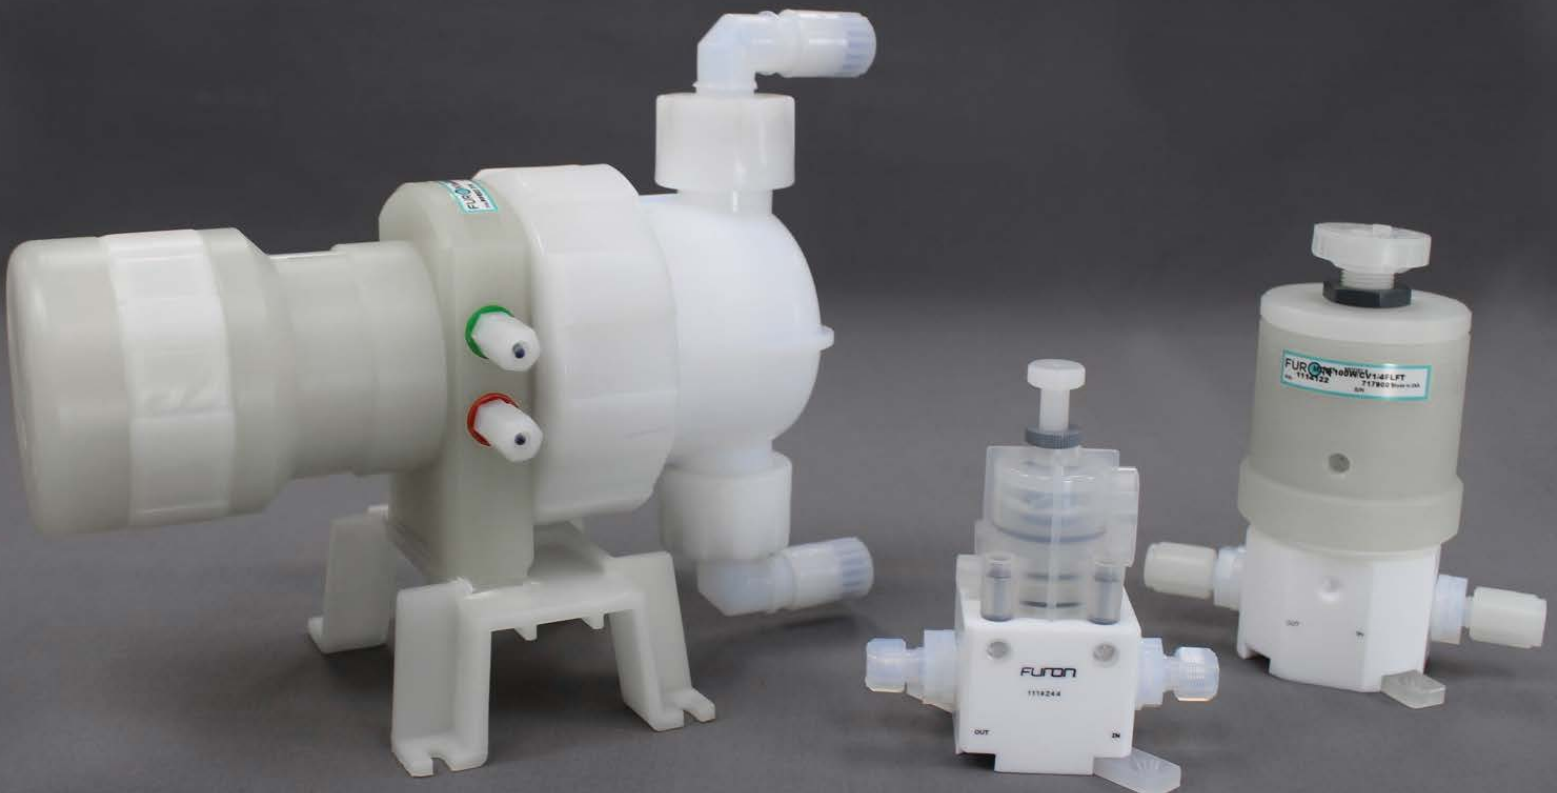



ACCESSORIES

Decades of interaction with industry users combined with our premium engineering knowledge led Saint-Gobain to develop a wide range of specific components ranging from gauge protectors to precision pressure regulators, all of which are crucial to customers' applications in the semiconductor industry.

Our broad product offering provides you with a comprehensive single source for high-purity fluid handling products. Our vast experience in injection molding of PFA and processing PTFE, coupled with state-of-the-art equipment assures an accurate and repeatable manufacturing process. This assures that our products meet or exceed the most stringent semiconductor industry standards for purity and ionic extractables to satisfy your critical fluid handling requirements.



FURON® UPBM Back Pressure Regulator

Actuation Type	Manual & Pneumatic
Orifice Size	1/4", 1/2"
Standard Connection Types	FlareGrip® II FuseBond™ Nippon Pillar Super 300® Female NPT
Connection Size	1/4", 3/8", 1/2", 3/4"
Max. Operating Temperature	194°F (90°C)
Max. Operating Pressure	90 PSIG (6.2 bar)
Pressure Regulation Range	10–60 PSIG (0.7–4.0 bar)

Features/Benefits:

- Maintains pre-determined pressure on the inlet side (back pressure)
- Designed for fluid temperatures up to 194°F (90°C)
- Composed of all virgin PTFE and PFA wetted flow paths
- Integral leak detection port is standard



FURON® UPRP Precision Pressure Regulator (1/4")

Actuation	Manual & Pneumatic
Orifice Size	1/4"
Standard Connection Types	FlareGrip® II FuseBond™ Nippon Pillar Super 300®
Connection Sizes	1/4", 3/8", 1/2"
Max. Operating Temperature	194°F (90°C)
Max. Operating Pressure	90 PSIG (6.2 bar)
Pressure Regulation Range	10 – 60 PSIG (0.7 – 4.0 bar)

Features/Benefits:

- Designed for fluid temperatures up to 194°F (90°C)
- Composed of all virgin PTFE/Fluoroloy®T and PFA wetted flow paths
- Integral leak detection port is standard
- PTFE isolation bellows provides secondary containment



FURON® UPRP Precision Pressure Regulator (1")

Actuation	Pneumatic
Orifice Size	1"
Standard Connection Types	FlareGrip® II Nippon Pillar Super 300®
Connection Sizes	3/4", 1"
Max. Operating Temperature	194°F (90°C)
Max. Operating Pressure	90 PSIG (6.2 bar)
Pressure Regulation Range	10 – 60 PSIG (0.7 – 4.0 bar)

Features/Benefits:

- Designed for fluid temperatures up to 194°F (90°C)
- Composed of all virgin PTFE/Fluoroloy®T and PFA wetted flow paths
- Integral leak detection port is standard
- PTFE isolation bellows provides secondary containment



FURON® UPRM Pressure Regulator

Actuation	Manual & Pneumatic
Orifice Size	1/4", 1/2"
Standard Connection Types	FlareGrip® II FuseBond™ Nippon Pillar Super 300® FNPT
Connection Sizes	1/4", 3/8", 1/2", 3/4"
Max. Operating Temperature	194°F (90°C)
Max. Operating Pressure	90 PSIG (6.2 bar)
Pressure Regulation Range	10 – 60 PSIG (0.7 – 4.0 bar)

Features/Benefits:

- All fluoropolymer wetted surfaces
- Integral leak port detection
- Precise construction maintains predetermined output pressure
- Non-metallic external surfaces
- Handles fluid temperatures up to 194°F (90°C)
- All fluoropolymer wetted surfaces





FURON[®] Static Mixer

Max. Flow Rate	1/2": 5.3 GPM (20 l/min) 1": 13.2 GPM (50 l/min)
Max. Pressure Drop	1/2": 9.0 PSID 1": 10.0 PSID
C _v	1/2": 1.75 1": 4.1
Media Operating Temperature	41°F to 212°F (5°C) to (100°C)
Media Operating Pressure	90 PSIG (6 bar) max. at room temperature

Features/Benefits:

- Mixes two or more chemistries with no moving parts
- Ideal for high-purity mixing applications
- Constructed from 100% virgin PTFE and high-purity PFA
- Compact design



FURON[®] Aspirator (Air & Liquid Actuated)

Actuation	Air or Liquid
Input Media Pressure	5 to 60 PSIG (0.34 to 4.1 bar)
Flow at Outlet Port*	0.5 to 2.5 GPM (1.9 to 9.5 LPM)
Standard Connection Types	Flare FNPT
Connection Sizes	3/8", 1/2"

Features/Benefits:

- 100% PTFE wetted parts
- Extremely reliable - no moving parts
- Easy to use & install




FURON[®] Gauge Protectors (Molded Diaphragms)

Max. Media Temperature	302°F (150°C)
Max. Media Pressure	120 PSIG (8 bar)
Accuracy	5% of Full Scale
End Connection	1/4" FNPT
Gauge Connection	1/4" FNPT
Fill Fluid	DI Water (standard)
Materials	PTFE/PFA

Features/Benefits:

- Proprietary diaphragm seals with zero hold-up volume or elastomers
- Variety of optional mounts including fuse-bonded flow-through tee option
- 100% non-metallic construction
- All molded high-purity PFA body; PTFE diaphragm
- Single or double diaphragm construction



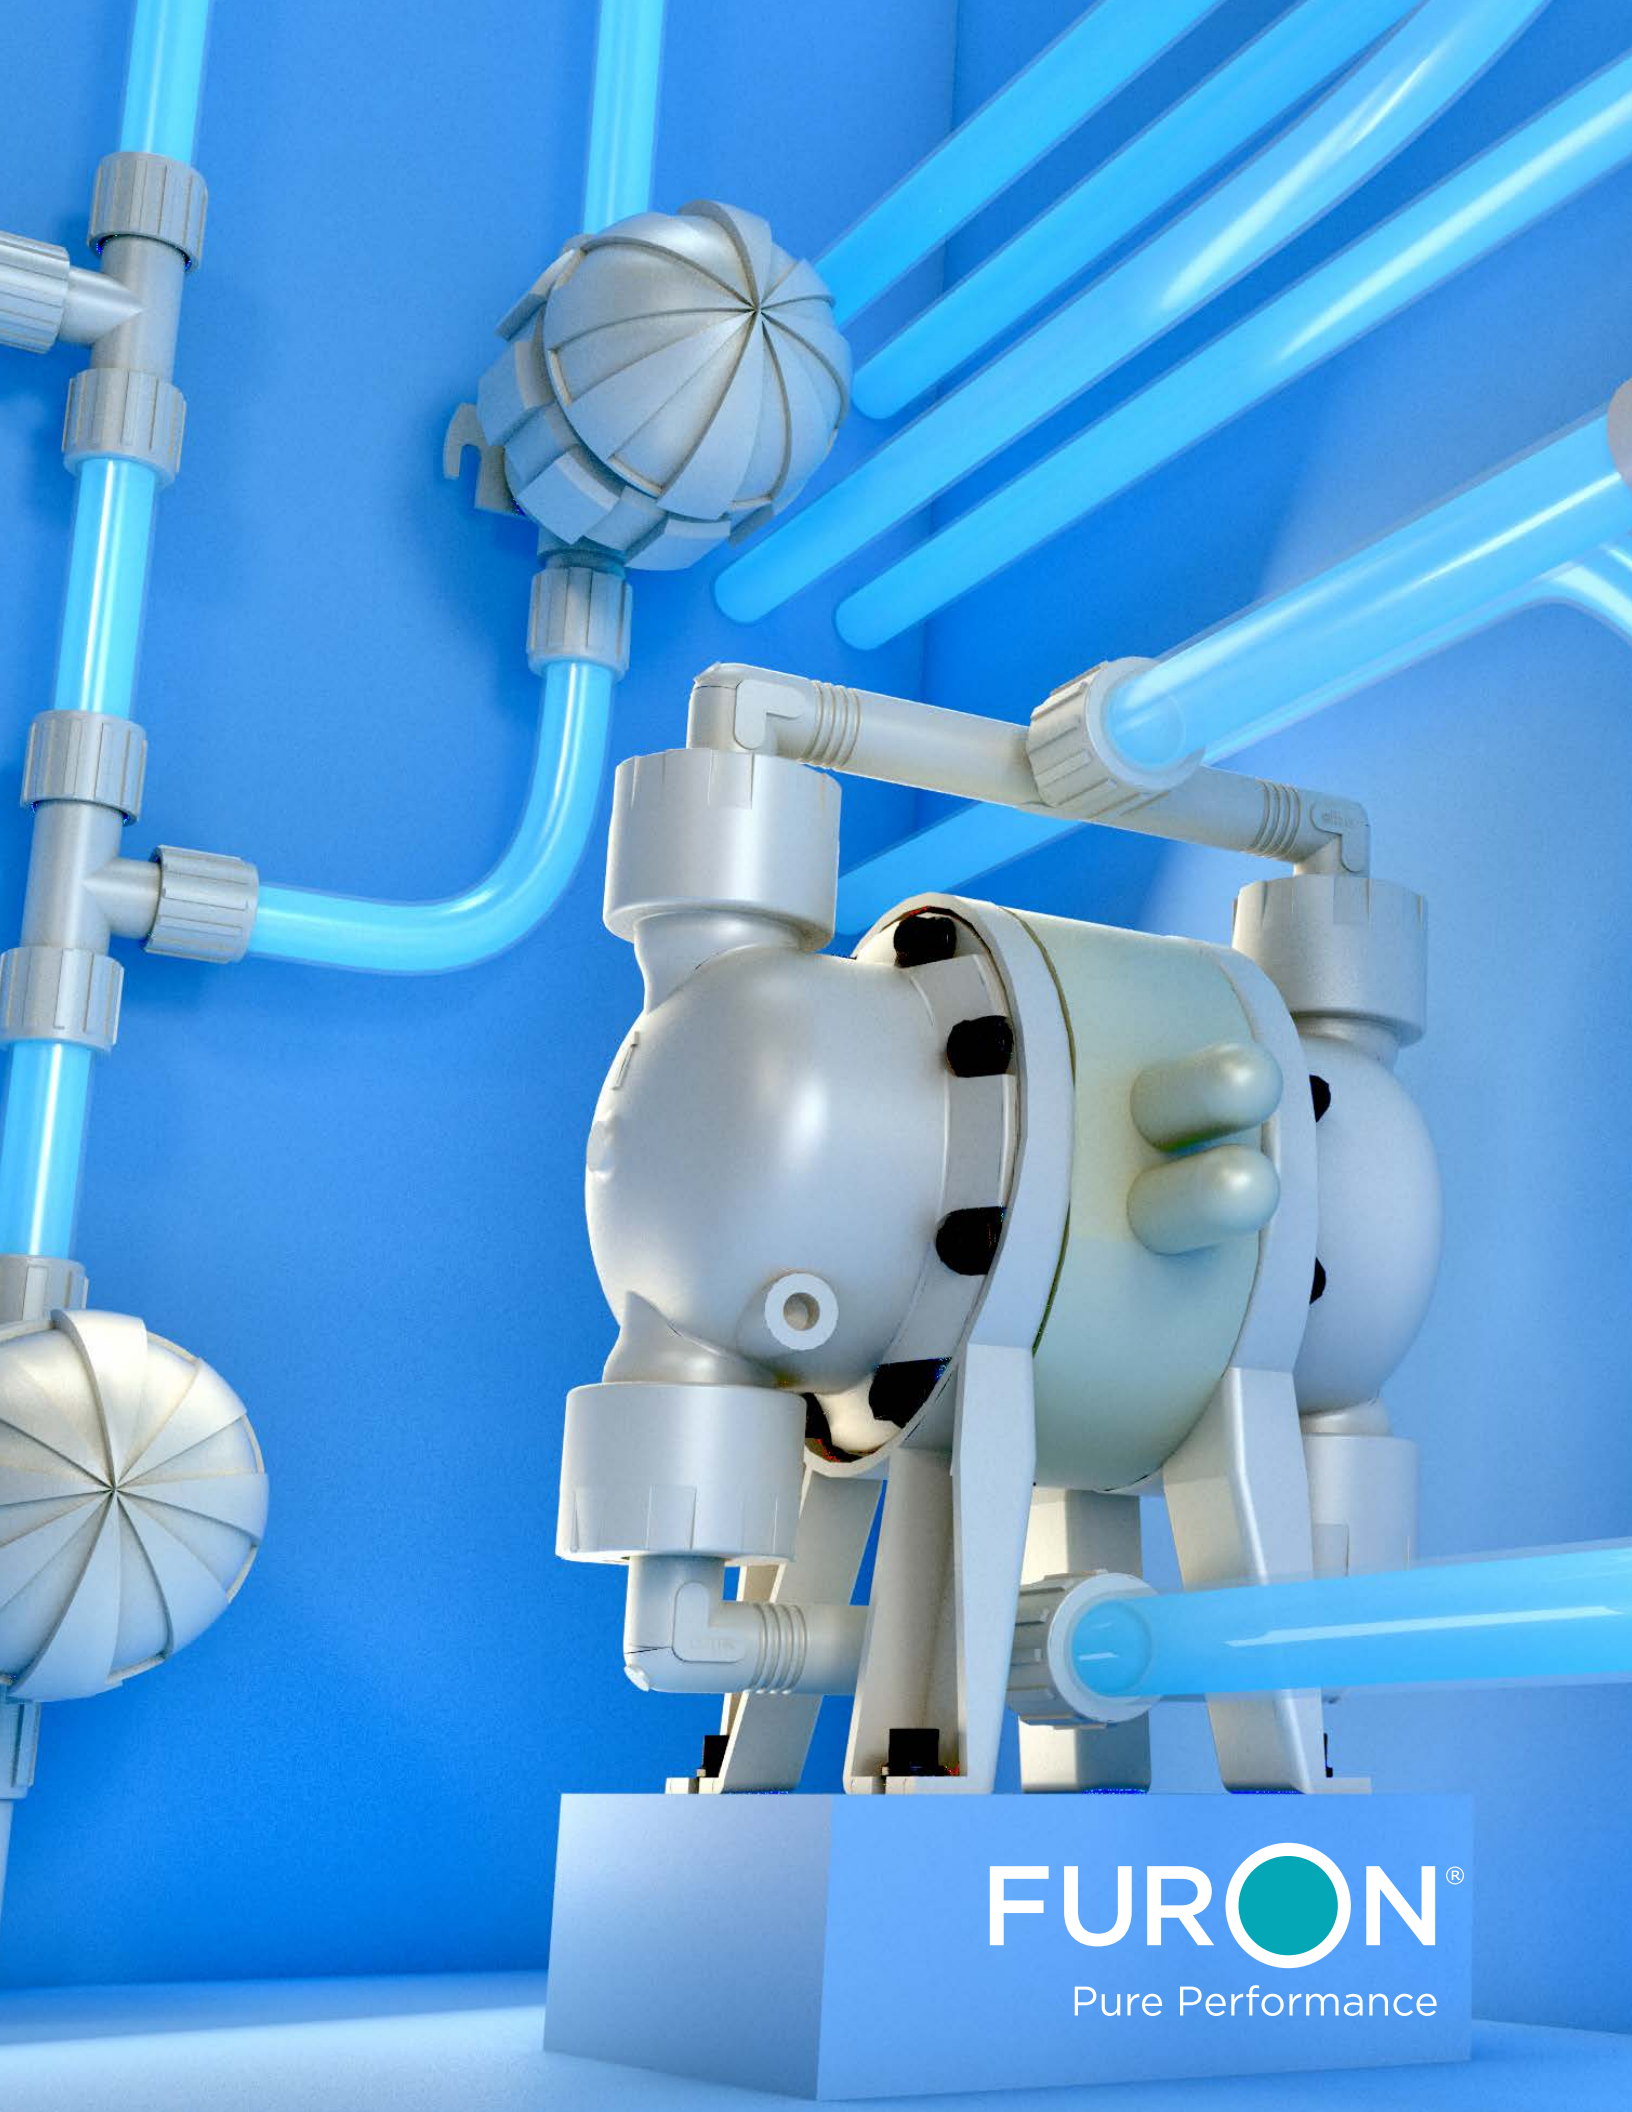

FURON[®]
Pure Performance



FITTINGS

Saint-Gobain's **Furon fitting line** offers a broad range of high-purity fluoropolymer fittings for the semiconductor industry. Our fitting product portfolio, which offers unique flexibility and modularity in your high-purity PFA pipe manifold systems, includes:

- **Furon FlareGrip II®** and **Furon FuseBond™** - industry standard fittings
- **Furon Dual Containment** and **Furon Grab Seal™** - fittings for specific applications
- **Furon No-O-Ring Union** - unique patent protected fittings

We offer decades of experience of injection molding of PFA and processing of PTFE, coupled with state-of-the-art equipment to assure accurate repeatable processes. This ensures our products meet or exceed the most stringent semiconductor industry standards for purity and ionic extractables to satisfy critical fluid handling requirements.



FURON® FlareGrip® II

Configurations	Unions (Union Adapters, Reducers, Panel, Straight Tube Union) Elbows (45° Union, Adapters, Reducers) Tees (Union, Reducer, Branch, Run)
Body Material	High-Purity PFA
Nut Material	PVDF, PFA, ETFE
Connection Sizes	1/8", 1/4", 3/8", 1/2", 3/4", 1"
Max. Operating Pressure	150 PSIG (10.3 bar)
Max. Operating Temperature	302°F (150°C)

Features/Benefits:

- Available in a large variety of size and configuration
- Interchangeable and compatible with most industry fluid handling systems
- Minimal dead space for fluid entrapment



FURON® Dual Containment Fitting

Configurations	Path Through Flare Fitting Front Seal Bulkhead Rear Seal Bulkhead
Body Material	High-Purity PFA
Nut Material	PVDF, PFA, ETFE
Connection Sizes	1/2", 3/4", 1"

Features/Benefits:

- Available in a large variety of size and configuration
- Optimal safety for your process and users



FURON® FuseBond™ Fitting

Configurations	Unions (Union Adapters, Reducers, No O-ring, Union) Elbows (45° Union, Adapters, Reducers) Tees (Union, Reducer, Branch)
Body Material	High-Purity PFA
Nut Material	N/A
Connection Sizes	1/4", 1/2", 3/4", 1", 2"

Features/Benefits:

- Lower hold-up volume due to reduced fitting size
- Manufactured from 100% virgin high-purity PFA
- O-ring free unions feature leak-tight patent-protected tongue and groove seal and are tested for 120 PSIG system pressure at 300°F (148°C)



FURON® Grab Seal™ Fitting

Configurations	Unions (Union Adapters, Reducers, Panel, Straight Tube Union) Elbows (45° Union, Adapters, Reducers) Tees (Union, Reducer, Branch, Run)
Body Material	High-Purity PFA
Nut Material	ETFE
Connection Sizes	1/8", 1/4", 3/8", 1/2", 3/4", 1"

Features/Benefits:

- Single design for ease of installation
- No special tools required






FURON[®] No O-Ring Fitting

Configurations	Straight Tube Union
Body Material	High-Purity PFA
Nut Material	ETFE
Pipe Connection Sizes	1/2", 3/4", 1", 2"
Max. Operating Pressure	150 PSIG (10.3 bar)
Max. Operating Temperature	302°F (150°C)

Features/Benefits:

- Molded from virgin premium high-purity PFA
- Ideally used with Furon HP PFA Pipe
- Patent protected tongue and groove seal
- Universal chemical resistance and compatibility
- High pressure capability
- Retains seal integrity over countless disassemblies/reassemblies
- No dead space



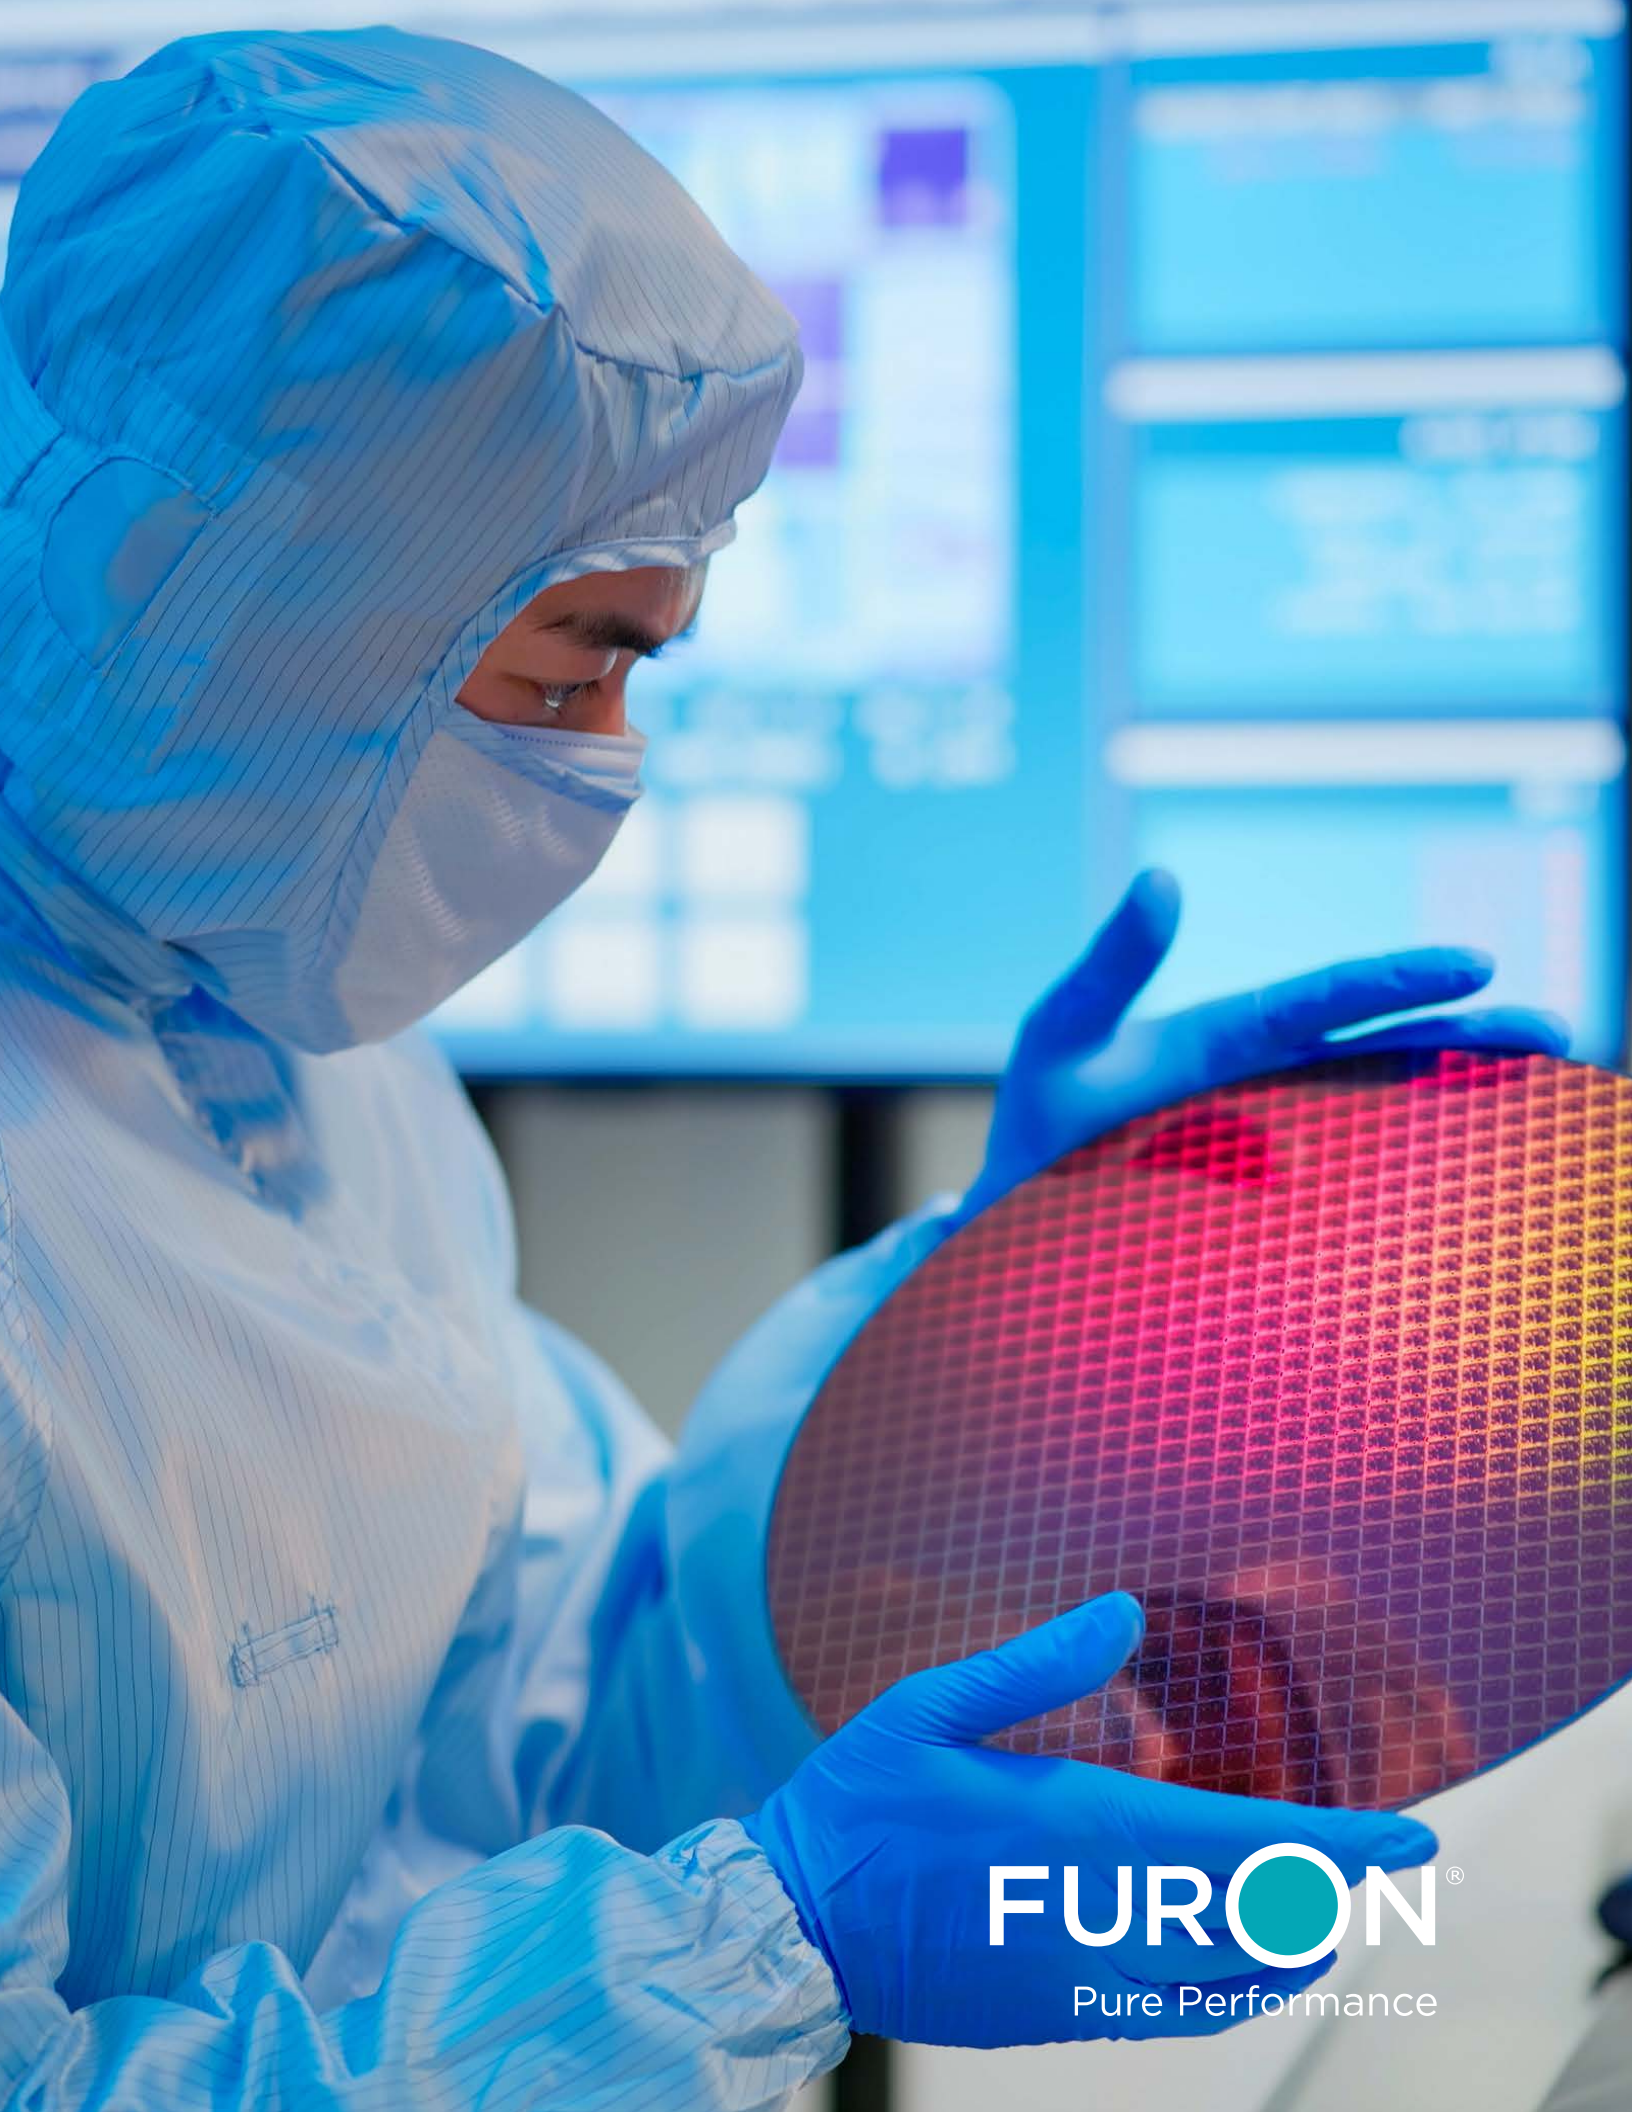


FURON[®]
Pure Performance



TUBING & HOSE

Saint-Gobain offers a wide range of tubing for demanding fluid transfer applications in a variety of industries. For the semiconductor industry, our **Furon** brand fluoropolymer tubing offers a range of sizes from a fraction of an inch up to several inches as well as a variety of shapes from very basic to very complex, including convoluted, corrugated or multi-lumen tubing. The Versilon® WTLCTPFA hose is designed to satisfy the semiconductor market on many levels: safety, performance, cleanliness and wide temperature capability range.

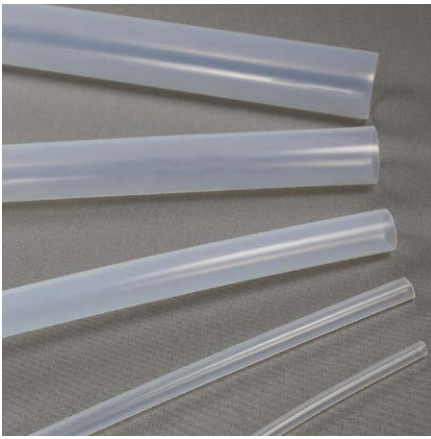


FURON[®] HP PFA 400 Tubing

Material	High-Purity PFA
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4" 1", 1-1/4", 1-1/2"
Wall Thickness	0.030" – 0.093"

Features/Benefits:

- Non-contaminating laser scribing for positive identification of size, material and 100% lot traceability
- Controlled production environment for premium purity
- Tube ends capped to prevent ID contamination
- Site redundancy for a safer & nimble production capability

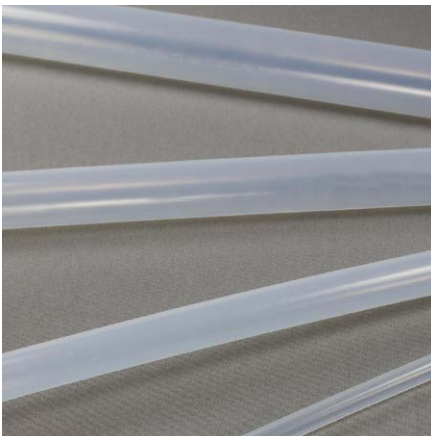


FURON[®] HP PFA 400 Straight Tubing

Material	High-Purity PFA
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4" 1", 1-1/4", 1-1/2"
Wall Thickness	0.030" – 0.093"

Features/Benefits:

- Straight length of 10 feet (standard or custom length) to facilitate product integration in your equipment
- 100% virgin high-purity ultra clean PFA resin - Specific material grade available
- Non-destructive/non-contaminating laser scribing for positive identification of size, material and 100% lot traceability

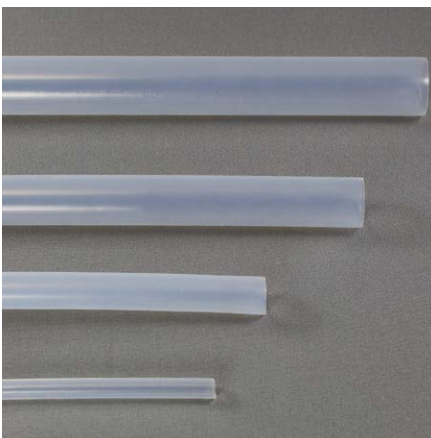

FURON[®] HP PFA 400 UC Tubing

Material	High-Purity PFA
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4" 1", 1-1/4", 1-1/2"
Wall Thickness	0.030" – 0.093"

Features/Benefits:

- Dedicated raw material with less than 5 ppb iron
- Non-contaminating laser scribing for positive identification of size, material and 100% lot traceability
- Improved surface roughness from inner tube
- Site redundancy for safer & nimble production capability
- Tube ends capped to prevent ID contamination



FURON[®] HP PFA 400 UC Straight Tubing

Material	High-Purity PFA
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4" 1", 1-1/4", 1-1/2"
Wall Thickness	0.030" – 0.093"

Features/Benefits:

- Dedicated raw material with less than 5 ppb iron
- Non-contaminating laser scribing for positive identification of size, material and 100% lot traceability
- Improved surface roughness from inner tube
- Site redundancy for safer & nimble production capability
- Tube ends capped to prevent ID contamination





FURON[®] HP PFA Pipe

Material	High-Purity PFA
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 3", 4", 5", 6"
Wall Thickness	0.068" – 0.154"
Standard Length	10' (3 m)

Features/Benefits:

- Manufactured from virgin high-purity PFA
- Nominal sizes standard in 10' lengths
- Custom packaging and conditioning
- Site redundancy for safer & nimble production capability



FURON[®] HP PFA Coax

Material	High-Purity PFA Inner Tube
Max. Operating Pressure	250 PSIG (17.2 bar)
Max. Operating Temperature	400°F (204°C)
Standard Sizes (OD)	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4"
Wall Thickness	0.030" – 0.060"
Max Continuous Length	500' (152.4 m)

Features/Benefits:

- Saves installation time
- Continuous lengths up to 500'
- Provides superior chemically resistant dual containment
- Compatible with Furon Dual Containment Flare Fittings
- Custom material & dimension for outer tube



FURON[®] PFA

Material	Standard PFA
Max. Operating Pressure	300 PSIG (20.68 bar)
Max. Operating Temperature	500°F (260°C)
Standard Sizes (OD)	1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1"
Wall Thickness	0.031" – 0.062"

Features/Benefits:

- Laser Etched for in Fab Traceability (where diameter and wall thickness allow)
- Excellent chemical resistance
- Retains higher mechanical strength at elevated temperatures
- High resistance to stress cracking




FURON[®] FEP

Material	FEP
Max. Operating Pressure	198 PSIG (13.65 bar)
Max. Operating Temperature	402°F (206°C)
Standard Sizes (OD)	1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1"
Wall Thickness	0.031" – 0.062"

Features/Benefits:

- Laser Etched for in Fab Traceability (where diameter and wall thickness allow)
- Excellent physical properties
- Exceptional electrical properties
- Outstanding chemical resistance
- Transparent tube
- UV resistance



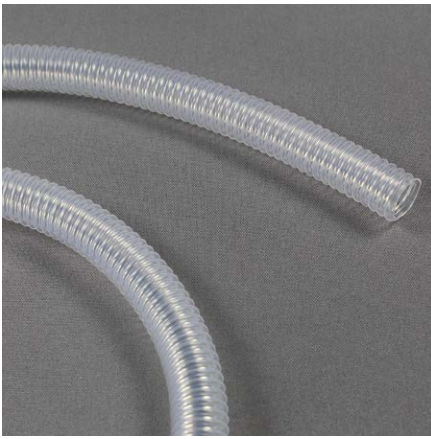


FURON® ConvoFlex™

Material	PFA, FEP, PTFE
Standard Sizes (OD)	From 1/4" to 4"
Max Continuous Length	500' (152.4 m)

Features/Benefits:

- Highly flexible
- Self draining
- Produced in continuous roll and can be cut at will

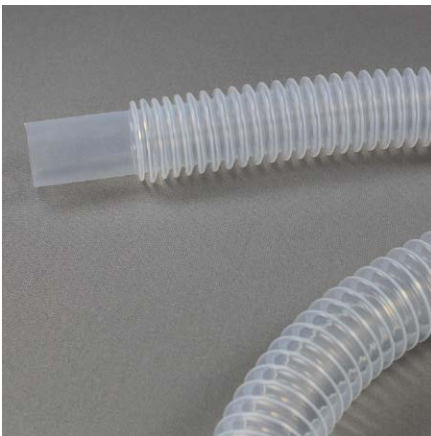

FURON® CT-Flex™

Material	PFA, FEP
Standard Sizes (OD)	From 1/4" to 2"
Max Continuous Length	12' (3.6 m)

Features/Benefits:

- Cuff and corrugation location are fully adjustable to match customer need
- Does not kink
- Higher resistance to vacuum or pressure than convoluted tubing
- Cuff end for easy & safe installation



VERSILON® WTLCTPFA Hose

Material	Inner core: PFA, Exterior: Polyester pycords, EPDM rubber, carbon steel wires
Max. Operating Pressure	500 PSI (3.45 MPa)
Max. Operating Temperature	350°F (177°C)
Standard Sizes (OD)	1.3", 1.56", 2.13", 2.68"
Max Continuous Length	100' (30.48 m)

Features/Benefits:

- Reduced extractables: lower levels of extractable fluoride ions reduce silicone wafer corrosion
- Superior chemical and heat resistance
- Wide temperature range
- Durable, kink resistant, with no external wire reinforcement to potentially fray
- Easy to clean non-stick smooth tube for assured sterility
- Can be cleaned with steam, caustics, solvents or other cleaning agents







FURON[®]
Pure Performance

A WORLD LEADER IN HIGH PERFORMANCE MATERIALS



Saint-Gobain Performance Plastics is the world's leading producer of engineered high-performance polymer products for all industries. With more than 50 locations in 75 countries, Saint-Gobain is positioned to provide innovative products and comprehensive service to a worldwide customer base.

Through a broad range of capabilities that rely on superior engineering and customer support, Saint-Gobain helps customers achieve safety regulations, performance and brand assurance

Our product applications include those in the electronics, food & beverage, and chemical sectors. We are helping customers in all of these industries achieve goals in innovation, efficiency, sustainability and product integrity through customized solutions such as flexible tubing, hoses, fittings, pumps, valves and manifolds.

Parent company, Compagnie de Saint-Gobain is one of the world's top 100 industrial corporations and a leader in the development and production of engineered materials. Established in France in 1665 the company is a leading producer of flat glass, packaging, insulation, building materials, abrasives, reinforcements, industrial ceramics and piping.

For additional Saint-Gobain microelectronics literature, technical information or news, scan the QR codes below.



Saint-Gobain
High-Purity
Electronics Products



LinkedIn
Saint-Gobain
Semiconductor



**Saint-Gobain
Performance Plastics**

7301 Orangetown Avenue
Garden Grove, CA 92841
1-800-833-5661
Tel: +1-714-630-5818

www.furon.com

US PATENTS: 6,000,416; 5,261,492; 5,645,301; 5,498,036; 5,575,311; 5,967,173; 5,652,391; 5,993,176; 7,335,003

NOTE: This document is intended to provide information about the product to enable you to consider whether generally the Product meets your application need and is not intended to provide product specification. This document should not be considered a Product warranty or guaranty. To the extent this document mentions any tests done by Saint-Gobain, such tests are done under controlled laboratory circumstances and hence other factors in your use and application may impact such values. Saint-Gobain strongly recommends that you conduct practical tests simulating the conditions of your application to ensure that the product meets your requirements for your specific application.

Furon®, FlareGrip®, FuseBond™, Grab Seal™, CT-Flex™, ConvoFlex™, Fluoroloy® and Versilon® are registered trademarks of Saint-Gobain Performance Plastics. Nippon Pillar Super 300® is a registered trademark of Nippon Pillar Packing Co.

FLS-6199-0524-SGLS

©2024 Saint-Gobain Performance Plastics